




Open & Enclosed Rotary Disconnect Switches

Exceptional Breadth and Availability for Your Application



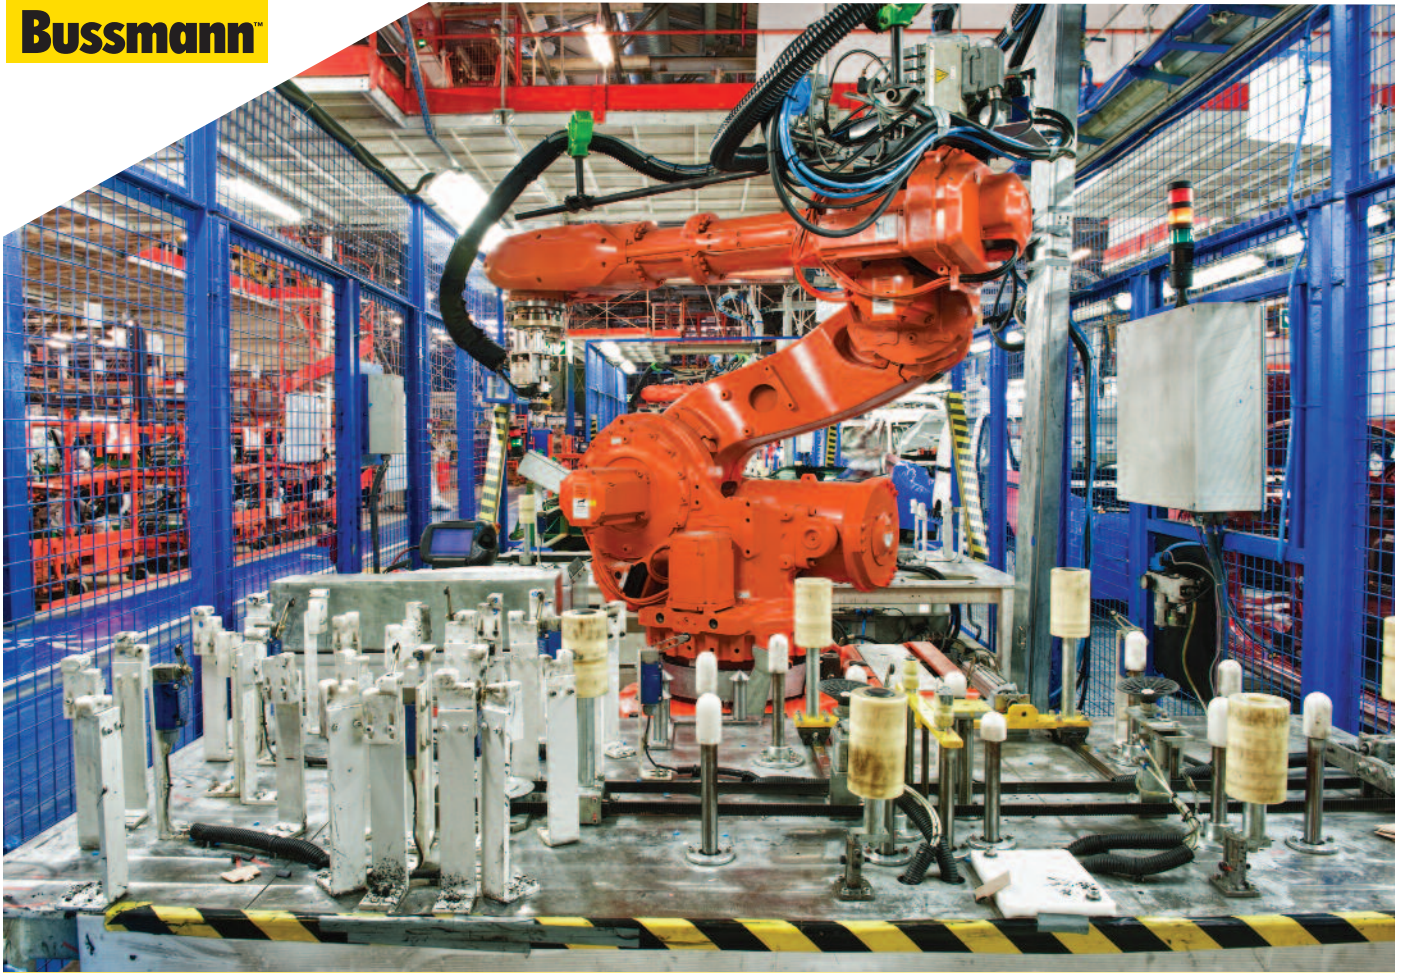

Eaton and Cooper united. Energizing a world that demands more.

We deliver:

- **Electrical solutions** that use less energy, improve power reliability and make the places we live and work safer and more comfortable
- **Hydraulic and electrical solutions** that enable machines to deliver more productivity without wasting power
- **Aerospace solutions** that make aircraft lighter, safer and less costly to operate, and help airports operate more efficiently
- **Vehicle drivetrain and powertrain solutions** that deliver more power to cars, trucks and buses, while reducing fuel consumption and emissions

Discover today's Eaton.

Powering business worldwide

As a global diversified power management company, we help customers worldwide manage the power needed for buildings, aircraft, trucks, cars, machinery and businesses.

Eaton's innovative technologies help customers manage electrical, hydraulic and mechanical power more reliably, efficiently, safely and sustainably.

We provide integrated solutions that help make energy, in all its forms, more practical and accessible.

With 2012 sales of \$16.3 billion, Eaton has approximately 103,000 employees around the world and sells products in more than 175 countries.

Eaton.com



Table of Contents


Compact Circuit Protector (CCP) Disconnect Switches

30A Class CC, Midget & 10x38	4-5
30A 60A and 100A Class CF	6-7



UL 98 Fused Disconnect Switches 30 to 800A

Introduction & Agency Information	8
Product Line Summary	9
30A Compact Class CC & Class J	10-11
30A Class J	12-13
60A Compact Class J	14-15
60A Class J	16-17
100A Class J	18-19
200A & 400A Class J	20-22
600A Class J and 800A Class L	24-25

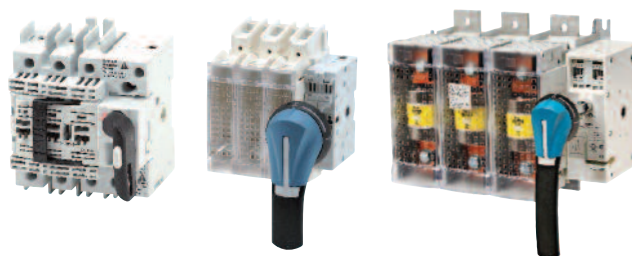

UL 98 Non-Fused Disconnect Switches 30 to 1200A

Introduction & Agency Information	26
Product Line Summary	27
30A, 60A and 100A Compact	28-29
100A, 200A and 400A Standard	30-31
600A, 800A, 1000A and 1200A Standard	32-33



UL 508 Non-Fused Disconnect Switches 16 to 80A

Introduction and Agency Information	34
Product Line Summary	35
16A, 25A, 40A, 63A and 80A Standard	36-38



Enclosed UL 98 & UL 508 Disconnect Switches

Introduction & Agency Information	39
Fused UL 98	
30A to 800A Enclosed Disconnects	40-41
Non-Fused UL 98	
30 to 1200A Enclosed Disconnects	42-43
Non-Fused UL 508	
16 to 80A Enclosed Disconnects	44-45



Part Number Index 46-47

Cooper Bussmann circuit protection solutions comply with major industrial standards and agency requirements such as: BS, IEC, DIN, UL, NEMA, SAE, CSA, CE, C-UL, etc. and are manufactured at facilities that are ISO 9000 certified. This catalog is intended to present product data and provide technical information that will help the end user with design application. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this catalog. Once a product has been selected, it should be tested by the user in all possible applications. Further, Cooper Bussmann takes no responsibility for errors or omissions contained in this catalog, or for misapplication of any Cooper Bussmann product. Extensive product information is available in the Cooper Bussmann product data sheets available online at www.cooperbussmann.com.

Printed in USA

©2013 Cooper Bussmann

Compact Circuit Protector (CCP) Disconnect Switch—30A

1-, 2- & 3-Pole, Class CC, UL Midget & 10x38mm IEC



Switch											
Amp Rating	Fuse Class	Number of Poles	Volts	SCCR	Max Horsepower Rating				Wire Size	Wire Type*	Part Number
					120 Vac	240 Vac	480 Vac	600 Vac			
30	CC	1	600Vac	200kA	0.5	—	—	—	Single/Dual #18-6 Sol/Str	75°C Cu	CCP-1-30CC
30	CC	2	600Vac	200kA	—	2	—	—		75°C Cu	CCP-2-30CC
30	CC	3	600Vac	200kA	—	3	4	7.5		75°C Cu	CCP-3-30CC
30	UL Midget	1	240Vac†	10kA†	—	—	—	—	Single #4 Sol/Str	75°C Cu	CCP-1-30M
32**	10x38 IEC		400Vac†	120kA†						75°C Cu	CCP-2-30M
30	UL Midget	2	240Vac†	10kA†	—	—	—	—		75°C Cu	CCP-2-30M
32**	10x38 IEC		400Vac†	120kA†					75°C Cu	CCP-3-30M	
30	UL Midget	3	240Vac†	10kA†	—	—	—	—	Spade Terminal††	75°C Cu	CCP-3-30M
32**	10x38 IEC		400Vac†	120kA†						75°C Cu	CCP-1-30DCC
30	CC	1	80Vdc†	20kA†	—	—	—	—		75°C Cu	CCP-1-30DCM
30	CC	1	80Vdc†	10kA†	—	—	—	—			
32**	10x38 IEC										
* 75°C or higher. ** 32A Class aM, 25A Class gG. † SCCR May be lower, refer to installed fuse data sheets. †† Spade terminal, 30A max, insulated flange, wire size #12-10 for #8 stud.											

Specifications

Agency Information

- CE Compliant
- RoHS Compliant
- For **Class CC** fuse version
 - UL 98 Listed, File E302370, Guide WHTY
 - cULus to CSA Standard 22.2 No. 4-04, File 302370, Guide WHTY7
- For **UL Midget and 10X38 IEC** fuse version
 - UL 508 Listed, File E161278, Guide 8R29
 - cULus Certified 22.2 No. 14-05
 - IEC 60947-3 AC23A
 - IEC 60947-3 DC23A

Terminals

- Single/dual conductor box lug or spade terminal suitable for line, load or accessory connection
- Torque: - #18-10 20Lb-In
- #8-4 35Lb-In

Storage and Operating Temperature

- -20°C to 75°C*
- * For fuse performance under or above 25°C, consult fuse performance derating charts in the Bussmann publication titled *Selecting Protective Devices (SPD)*, reorder #3002.

Flammability Rating UL 94V0

Lockout/Tagout Provisions

- 4mm shank lock or standard pin-out devices

Mounting

- 35mm DIN-Rail

Local Open Fuse Indication Minimum Voltage**

- 90Vac for AC versions
- 12Vdc for DC versions


** Circuit must be closed for indication light to illuminate.

Features

- IP20 Finger-safe construction with #10 or larger wire
- Switch interlock prohibits removing the fuse under load

Accessories

- Auxiliary contacts
- PLC Wired remote fuse indication
- Flex shaft handle mechanism

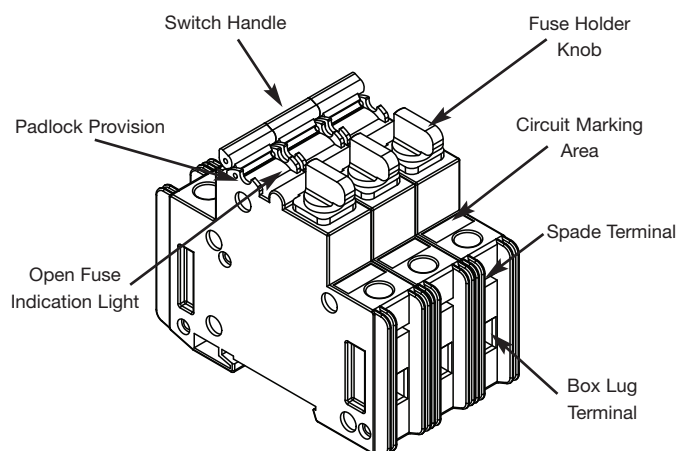

Available Cooper Bussmann Fuses

Class	Type	Data Sheet #
CC	LP-CC Time-Delay, Current Limiting	1023
CC	FNQ-R Time-Delay	1014
CC	KTK-R Fast-Acting	1015
M	FNM Time-Delay	2028
M	FNQ Time-Delay	1012
M	KTK Fast-Acting	1011
M	BAF Fast-Acting	2011
M	KLM Fast-Acting 600Vac/dc	2020


Data Sheet: 1157

Compact Circuit Protector (CCP) Disconnect Switch—30A

1-, 2- & 3-Pole, Class CC, UL Midget & 10x38mm IEC

Dimensions – mm (in)


Class CC, UL Midget & 10x38 IEC

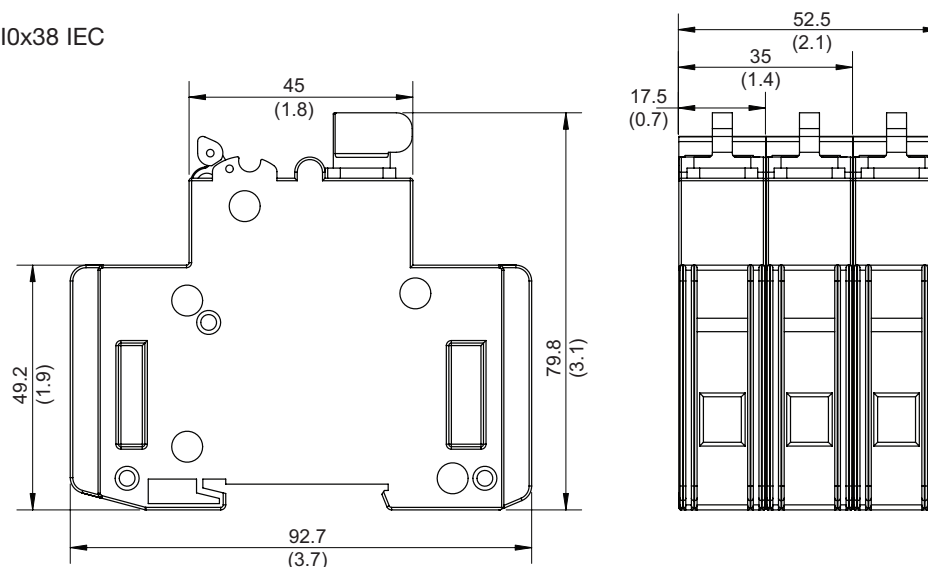

Auxiliary Contacts



PLC Indicator
(Includes leads with spade terminals)



Flex Shaft Handle Mechanism

CCP-_-30_Accessories					
Description	Configuration	Signal Output	Minimum Circuit Voltage	Agency Information	Part Number
Auxiliary Contacts NO+NC for Switch Status	1 per CCP	5A/240Vac	–	UL 98 Recognized, cURus 22.2 No. 4-04, IEC 60947-5-1 AC15	CCP-AUX*
Wired Remote Fuse Indication for PLC Applications	1 per CCP	24Vdc	100Vac	UL 98 Recognized, cURus 22.2 No. 4-04	CCP-PLC-IND*
Flex Shaft Handle Mechanism	3-Pole CCP	–	–	UL 98 Recognized	CCPHM-FXX**
* Refer to Data Sheet # 1157 for details, cannot be used with rotary or flange handle mechanism.					
** CCP-3-30CC only - switch is included when ordering this part number, refer to Product Profile #3178 for details.					

Compact Circuit Protector (CCP) Disconnect Switch—30, 60 & 100A

1-, 2- & 3-Pole, Class CF CUBEFuse™



Switch											
Amp Rating	Fuse Class	Number of Poles	Volts	SCCR	Max Horsepower Rating				Wire Size	Wire Type*	Part Number
					120 Vac	240 Vac	480 Vac	600 Vac			
30	CF	1	600Vac 125Vdc	200kA	1.5	—	—	—	Single/Dual #18-6 Sol/Str	75°C Cu	CCP-1-30CF
30	CF	2	600Vac 125Vdc	200kA	—	3	—	—		75°C Cu	CCP-2-30CF
30	CF	3	600Vac 125Vdc	200kA	—	5	15	10		75°C Cu	CCP-3-30CF
60	CF	1	600Vac 125Vdc	200kA	3	—	—	—	Single #4 Sol/Str Spade Terminal**	75°C Cu	CCP-1-60CF
60	CF	2	600Vac 125Vdc	200kA	—	7.5	—	—		75°C Cu	CCP-2-60CF
60	CF	3	600Vac 125Vdc	200kA	—	7.5	20	10		75°C Cu	CCP-3-60CF
100	CF	1	600Vac	200kA	5	—	—	—	Single #8-10 Sol/Str #8-1 Str Dual #6 Str Spade Terminal**	75°C Cu	CCP-1-100CF
100	CF	2	600Vac	200kA	—	10	—	—		75°C Cu	CCP-2-100CF
100	CF	3	600Vac	200kA	—	20	50	50		75°C Cu	CCP-3-100CF
* 75°C or higher.											
** Spade terminal, 30A max, insulated flange, wire size #12-10 for #8 stud.											

* 75°C or higher.

** Spade terminal, 30A max, insulated flange, wire size #12-10 for #8 stud.

Specifications

Agency Information

- CE Compliant
- RoHS Compliant
- UL 98 Listed, File E302370, Guide WHTY
- cULus to CSA Standard 22.2 No. 4-04, File 302370, Guide WHTY7

Terminals

- Single/dual conductor box lug or spade terminal suitable for line, load or accessory connection
- Torque: 0-60A: - #18-10 20Lb-In
- #8-4 35Lb-In
70-100A: - #18-10 Single 25Lb-In
- #8-2 Single 35Lb-In
- #1 Single 40Lb-In
- #6 Dual 45Lb-In

Fuses

- Uses finger-safe Class CF CUBEFuse™ with Class J performance
 - Low-Peak™ dual-element, time-delay*
 - Non-indicating 1-100A
 - Indicating 6-100A
 - Fast-Acting** 1-100A

* See Data Sheet # 9000

** See Data sheet # 2147

Storage and Operating Temperature

- -20°C to 75°C***

*** For fuse performance under or above 25°C, consult fuse performance derating charts in the Bussmann publication titled *Selecting Protective Devices (SPD)* reorder #3002.

Flammability Rating UL 94V0

Lockout/Tagout Provisions

- 4mm shank lock or standard pin-out devices

Data Sheet: 1157

Mounting

- 35mm DIN-Rail

Local Open Fuse Indication Minimum Voltage†

- 90Vac/115Vdc


† Circuit must be closed for indication light to illuminate.

Features

- Ampacity rejecting disconnects will not accept CUBEFuse amp ratings greater than switch rating
- IP20 Finger-safe construction with #10 or larger wire
- Switch interlock prohibits removing the fuse under load

Accessories

- Auxiliary contacts
- PLC Wired remote fuse indication (up to 60A)
- Rotary handle mechanism
- Flex shaft handle mechanism

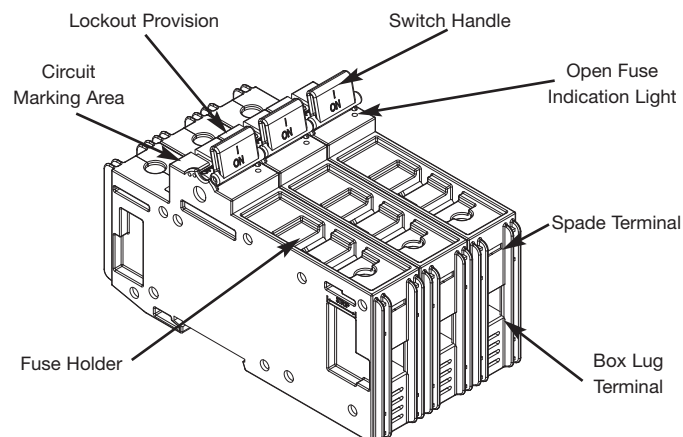


Compact Circuit Protector (CCP) Disconnect Switch—30, 60 & 100A



1-, 2- & 3-Pole, Class CF CUBEFuse™

Dimensions – mm (in)

30 and 60 Amp

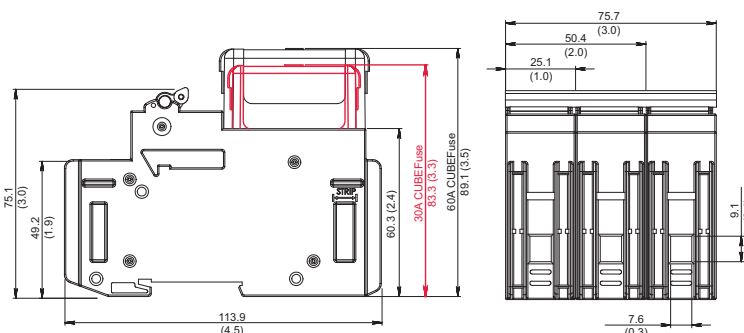

100 Amp

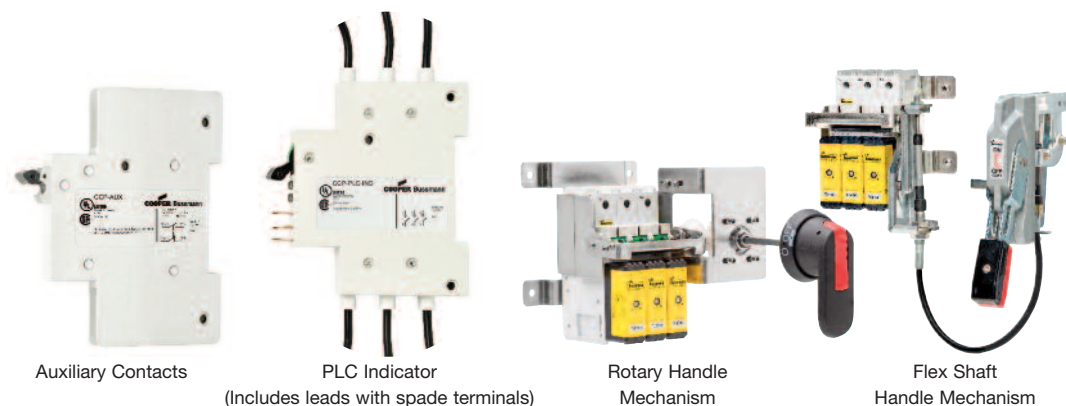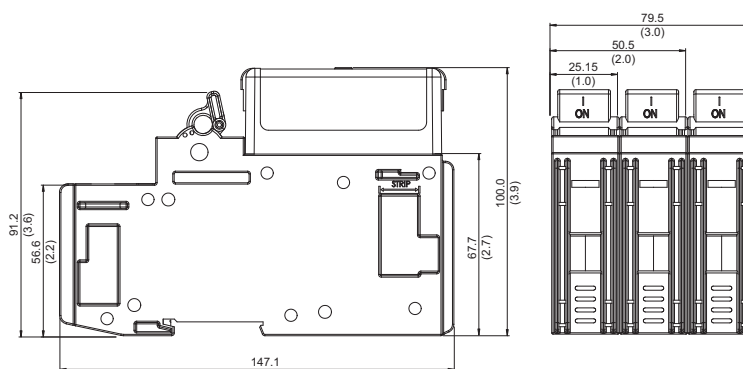

CCP- _ _ CF Accessories					
Description	Configuration	Signal Output	Minimum Circuit Voltage	Agency Information	Part Number
Auxiliary Contacts NO+NC for Switch Status up to 60A	1 per CCP	5A/240Vac	–	UL 98 Recognized, cURus 22.2 No. 4-04, IEC 60947-5-1 AC15	CCP-AUX*
Auxiliary Contacts NO+NC for Switch Status 70 to 100A	1 per CCP	5A/240Vac	–	UL 98 Recognized, CSA C22.2 No. 4	CCP-AUX-100*
Wired Remote Fuse Indication for PLC Applications	1 per CCP	24Vdc	100Vac	UL 98 Recognized, cURus 22.2 No. 4-04	CCP-PLC-IND*
Wired Remote Fuse Indication for PLC Applications up to 60A	1 per CCP	8A/24Vdc	100Vac	UL 98 Recognized, CSA C22.2 No. 4	CCP-PLC-100*
Rotary Handle Mechanism	3-Pole CCP	–	–	UL 98 Recognized	CCPHM-RXX**
Flex Shaft Handle Mechanism	3-Pole CCP	–	–	UL 98 Recognized	CCPHM-FXX***

* Refer to Data Sheet # 1157 for details, cannot be used with rotary or flange handle mechanism.
 ** CCP-3-100CF only. Order switch separately. Refer to Product Profile #3178 for details.
 *** CCP-3-30CF, CCP-3-60CF and CCP-3-100CF. Order switch separately. Refer to Product Profile #3178 for details.

UL 98 Fused Rotary Disconnect Switches—30 to 800A

Description

Cooper Bussmann UL 98 and UL 489 fused disconnect switches “break” and “make” power circuits ON and OFF load.

The switches employ double break contacts per pole that help ensure complete isolation of the fuse when the switch is in the “OFF” position.

Features

- Make and break power under load
- Double break by pole
- DIN-Rail or panel mount (30-100A)
- Up to 200kA Short-Circuit Current Rating
- Finger-safe covers
- Compact footprints available
- Defeatable handles automatically re-latch when the panel door is closed
- Most disconnect switches are front, right side, flange or direct handle operable
- NFPA 79 Compliant handle kits


Agency Information

- UL 98, Guide WHTY, File E155130
- UL 489, Guide WJAZ, File E359801
- CSA 22.2 No. 4, File 257020
- Conforms with IEC 60947-3
- NFPA 79 (2002 Edition)

Online Resources

Visit www.cooperbussmann.com/Disconnects for:

- CAD Drawings
- Instruction Sheets
- UL Information

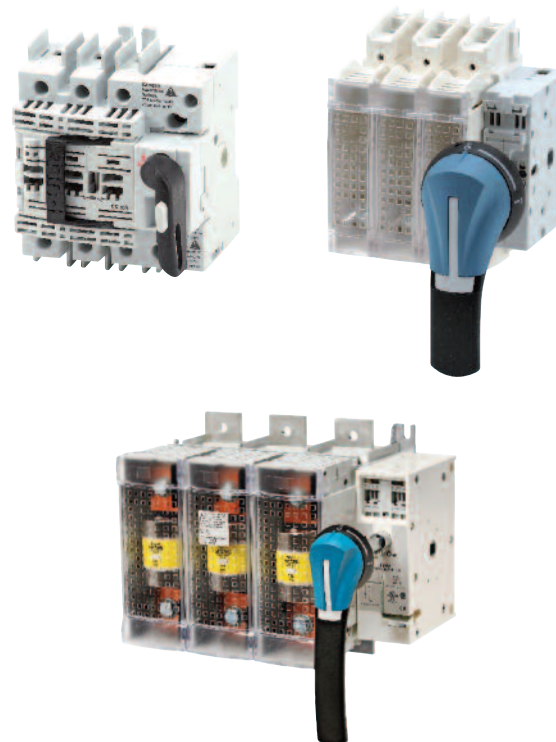

QuikShip 
Everyday

QuikShip Everyday Service ships the most common part numbers within 24 hours. Contact your Cooper Bussmann representative for details.




Available Cooper Bussmann Fuses

Class	Type	Data Sheet #
CC	LP-CC Time-Delay, Current Limiting	1023
CC	FNQ-R Time-Delay	1014
CC	KTK-R Fast-Acting	1015
J	LPJ Time-Delay, Current Limiting	1006 (0-60A)
J		1007 (70-600A)
J	With easyID™ open fuse indication	1062 (6-60A)
J		1063 (70-600A)
J	JKS Fast-Acting Fuses	1026 (0-60A)
J		1027 (70-600A)
J	DFJ High Speed Drive Fuse	1048 (0-600A)
L	KRP-C Time-Delay, Current Limiting	1008
L	KTU Fast-Acting	1010
L	KLU Time-Delay	1013

UL 98 Fused Rotary Disconnect Switches—30A

Compact Class CC & Class J

For a Complete Assembly, Please Select:



SWITCH		Switch																		
		Amp Rating	Fuse Class	Number of Poles	SCCR	Max Horsepower Rating, 3-Ph			Wire Size	Wire Type	Part Number									
		30	CC	3	100kA	220/240Vac	440/480Vac	600 Vac	#14-10 Sol/Str	75°C Cu	RDF30CC-3									
		30	CC	3 + Ntrl*	100kA	7.5	15	20	#14-10 Sol/Str	75°C Cu	RDF30CC-3N									
		30	J	3	100kA	7.5	15	20	#14-10 Sol/Str	75°C Cu	RDF30J-3-COMP									
											30	J	3 + Ntrl*	100kA	7.5	15	20	#14-10 Sol/Str	75°C Cu	RDF30J-3N-COMP
	* Neutral is switched.																			
	+																			
	HANDLE		Direct Mount Handle - mounts directly to switch, no shaft required								Part Number									
			For Switch Part Number	Color	Test Function	Padlockable														
RDF30CC-__			Black	Y	Y				DIR-05											
											RDF30J-__COMP	Black	Y	Y				DIR-06		
OR																				
		External Front Operated Selector Handle - shaft required								Part Number										
		NEMA Type	Color	Test Function	Padlockable	Defeatable														
		1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-04B													
		1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-04R													
	Shafts for Selector Handles								Part Number											
	Length in (mm)	Mounting Depth (X) in (mm)																		
	7.9 (200)	4.02~9.65 (102~245)	SH1-200																	
	12.6 (320)	4.02~14.37 (102~365)	SH1-320																	
	15.7 (400)	4.02~17.52 (102~445)	SH1-400																	
OR																				
	External Front Operated Pistol Handles - shaft required								Part Number											
	NEMA Type	Color	Test Function	Padlockable	Defeatable															
	1, 3R, 12	Black	N	Y	Y	H12-05B														
	1, 3R, 12	Red/Yellow	N	Y	Y	H12-05R														
	1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-05B														
	1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-05R														
	1, 3R, 4, 4X, 12	Black	Y	Y	Y	H4X-05TB														
	1, 3R, 4, 4X, 12	Red/Yellow	Y	Y	Y	H4X-05TR														
		Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required								Part Number										
NEMA Type		Color	Test Function	Padlockable	Defeatable															
1, 3R, 4, 4X, 12		Black	N	Y	Y	H4X-05BHD														
1, 3R, 4, 4X, 12		Red/Yellow	N	Y	Y	H4X-05RHD														
Shafts for Pistol Handles								Part Number												
Length in (mm)		Mounting Depth (X) in (mm)																		
7.9 (200)		4.02~9.65 (102~245)	SH2-200																	
12.6 (320)		4.02~14.37 (102~365)	SH2-320																	
15.7 (400)		4.02~17.52 (102~445)	SH2-400																	
OR																				
	NFPA Through the Door Handle Kit - to be used with selector handle or front pistol handle								Part Number											
	Color	Test Function	Padlockable	Defeatable																
	Red	N	Y	N	H79-1															
and...																				
ACCESSORIES		Auxiliary Contacts																		
		Contact Type	Number of Contacts	Continuous Amp Rating	Voltage Rating	Maximum Number of Auxiliary Contacts per Disconnect Switch Part Number			Part Number											
		NO	1	10A	600Vac	RDF30CC-__: 4 / 8 with BAC-HOLDER2			BAC05 ⁽¹⁾											
		NC	1	10A	600Vac	RDF30J-__COMP: 2 / 6 with BAC-HOLDER2			BAC06 ⁽¹⁾											
		Auxiliary Contact Holder				Accepts 4 Auxiliary Contacts: BAC05 or BAC06			BAC-HOLDER2 ⁽²⁾											

UL 98 Fused Rotary Disconnect Switches—30A



Compact Class CC & Class J

Dimensions – in (mm)

• RDF30CC-

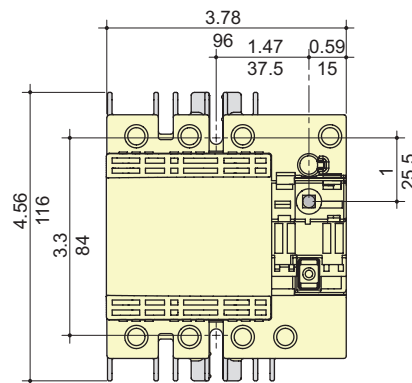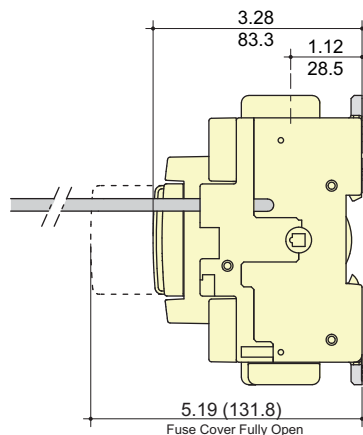

• RDF30J- -COMP

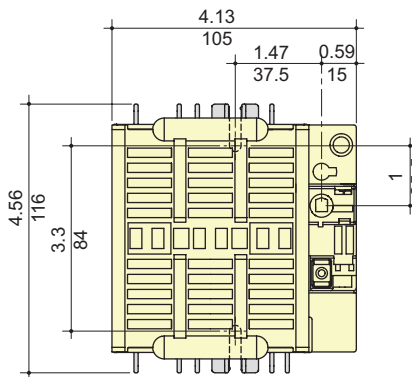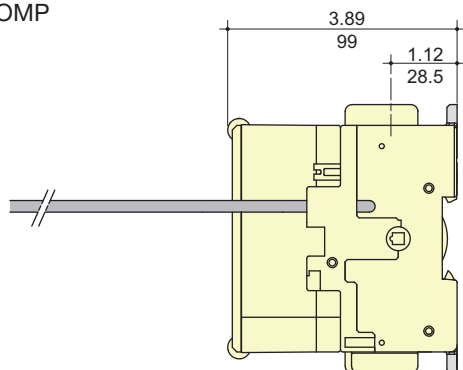


External Front Selector Handle

Selector Handle Type

Direction of Front Operation

Door Drilling Layout

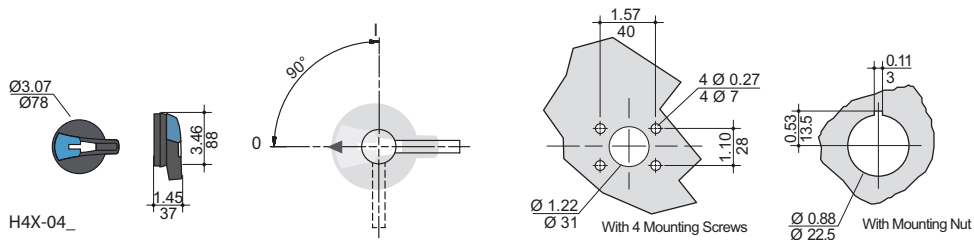


External Front Pistol Handles

Pistol Handle Type

Direction of Front Operation


Door Drilling Layout

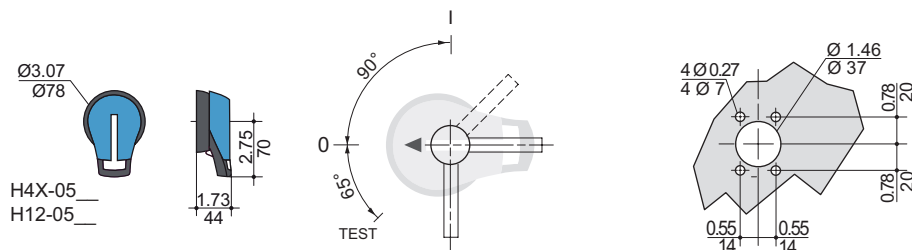

UL 98 Fused Rotary Disconnect Switches—30A

Standard Class J

For a Complete Assembly, Please Select:

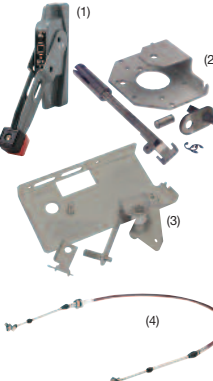
SWITCH	Switch												
	Amp Rating	Fuse Class	No. of Poles	SCCR	Max Horsepower Rating						Wire Size	Wire Type	Part Number
					1-Phase 220/240Vac	3-Phase 220/240Vac	3-Phase 440/480Vac	3-Phase 600 Vac	DC* 125 Vdc	DC* 250 Vdc			
	30	J	2	200kA	3	-	-	-	3	5	#14-10 Sol #14-6 Str	75°C Cu	RDF30J-2
	30	J	3	200kA	-	7.5	15	20	3	5	#14-10 Sol #14-6 Str	75°C Cu	RDF30J-3
	30	J	4	200kA	-	7.5	15	20	3	5	#14-10 Sol #14-6 Str	75°C Cu	RDF30J-4
* DC Ratings use two poles in series.													
+													
	Direct Mount Handle - mounts directly to switch, no shaft required												
	For Switch Part Number		Color		Test Function		Padlockable				Part Number		
	All Switches		Black		Y		Y - On Switch				DIR-07		
or													
 or  + 	External Front Operated Pistol Handles - shaft required												
	NEMA Type	Color		Test Function		Padlockable		Defeatable		Part Number			
	1, 3R, 12	Black		N		Y		Y		H12-05B			
	1, 3R, 12	Red/Yellow		N		Y		Y		H12-05R			
	1, 3R, 4, 4X, 12	Black		N		Y		Y		H4X-05B			
	1, 3R, 4, 4X, 12	Red/Yellow		N		Y		Y		H4X-05R			
	1, 3R, 4, 4X, 12	Black		Y		Y		Y		H4X-05TB			
	1, 3R, 4, 4X, 12	Red/Yellow		Y		Y		Y		H4X-05TR			
	Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required												
	NEMA Type	Color		Test Function		Padlockable		Defeatable		Part Number			
	1, 3R, 4, 4X, 12	Black		N		Y		Y		H4X-05BHD			
	1, 3R, 4, 4X, 12	Red/Yellow		N		Y		Y		H4X-05RHD			
	External Right Side Operated Pistol Handles - shaft required												
	NEMA Type	Color		Test Function		Padlockable		Defeatable		Part Number			
	1, 3R, 4, 4X, 12	Black		N		Y		N/A		H4X-05SB			
1, 3R, 4, 4X, 12	Red/Yellow		N		Y		N/A		H4X-05SR				
Shafts for Pistol Handles													
Length in (mm)	Mounting Depth (X) in (mm)								Part Number				
7.9 (200)	5.30~9.06 (135~230)								SH5-200				
12.6 (320)	5.30~13.78 (135~350)								SH5-320				
15.7 (400)	5.30~16.93 (135~430)								SH5-400				
or													
	Flange Handle ⁽¹⁾ - requires shaft operated mechanism or cable operated mechanism + cable												
	NEMA Type	Flange Style		Test Function		Padlockable		Defeatable		Part Number			
	1, 3R, 4, 12	Standard		N		Y		Y		FLH1			
	1, 3R, 4, 4X, 12	Chrome Plated		N		Y		Y		FLH2			
	Shaft Operated Flange Mechanism ⁽²⁾ - includes shaft												
	For Enclosure Depth - in (mm)									Part Number			
	6~24 (152~613)									FLRM			
	Cable Operated Flange Mechanism and Cable - must select Mechanism ⁽³⁾ and Cable ⁽⁴⁾												
	Item / Length									Part Number			
	Cable Mechanism									FLCM			
36" (900mm) Cable									FLC36				
60" (1500mm) Cable									FLC60				
120" (3000mm) Cable									FLC120				
or													
	NFPA Through the Door Handle Kit - to be used with selector handle or front pistol handle												
	Color			Test Function		Padlockable		Defeatable		Part Number			
Red			N		Y		N		H79-2				

UL 98 Fused Rotary Disconnect Switches—30A


Standard Class J

and ...						
Acc.		Auxiliary Contacts				
		Contact Type	Number of Contacts	Continuous Amp Rating	Voltage Rating	Max Number of Aux Contacts per Switch
		NO	1	10A	600Vac	4
		NC	1	10A	600Vac	4
						Part Number
						BAC05
						BAC06

Dimensions – in (mm)

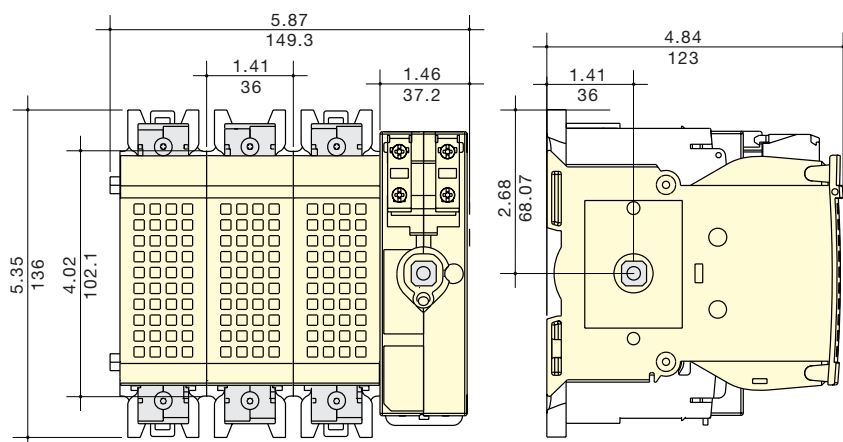


Direct Mount Handle



DIR-07

Flange Handle

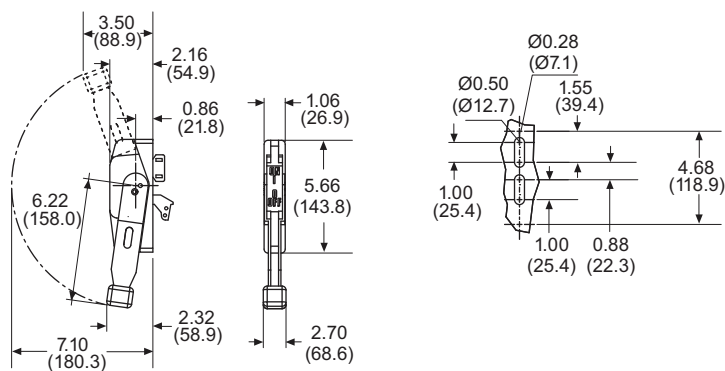

FLH_


External Front & Right Side Pistol Handle

Handle Type




Direction of Front Operation

Direction of Right Side Operation

Door Drilling Layout




H4X-05
H12-05



UL 98 Fused Rotary Disconnect Switches—60A

Compact Class J

For a Complete Assembly, Please Select:

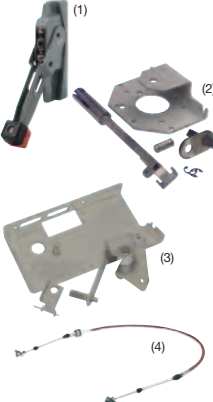
Select for Standard Applications		Switch																																																																						
		<table border="1"> <thead> <tr> <th rowspan="2">Amp Rating</th> <th rowspan="2">Fuse Class</th> <th rowspan="2">Number of Poles</th> <th rowspan="2">SCCR</th> <th colspan="4">Max Horsepower Rating</th> <th colspan="2">DC*</th> <th rowspan="2">Wire Size</th> <th rowspan="2">Wire Type</th> <th rowspan="2">Part Number</th> </tr> <tr> <th>1-Phase 220/240Vac</th> <th>220/240Vac</th> <th>440/480Vac</th> <th>600 Vac</th> <th>125 Vdc</th> <th>250 Vdc</th> </tr> </thead> <tbody> <tr> <td>60</td> <td>J</td> <td>2</td> <td>100kA</td> <td>10</td> <td>-</td> <td>-</td> <td>-</td> <td>5</td> <td>10</td> <td>#14-10 Sol #14-6 Str</td> <td>75°C Cu</td> <td>RDF60J-2-COMP</td> </tr> <tr> <td>60</td> <td>J</td> <td>3</td> <td>100kA</td> <td>-</td> <td>15</td> <td>30</td> <td>50</td> <td>5</td> <td>10</td> <td>#14-10 Sol #14-6 Str</td> <td>75°C Cu</td> <td>RDF60J-3-COMP</td> </tr> <tr> <td>60</td> <td>J</td> <td>4</td> <td>100kA</td> <td>-</td> <td>15</td> <td>30</td> <td>50</td> <td>5</td> <td>10</td> <td>#14-10 Sol #14-6 Str</td> <td>75°C Cu</td> <td>RDF60J-4-COMP</td> </tr> </tbody> </table>	Amp Rating	Fuse Class	Number of Poles	SCCR	Max Horsepower Rating				DC*		Wire Size	Wire Type	Part Number	1-Phase 220/240Vac	220/240Vac	440/480Vac	600 Vac	125 Vdc	250 Vdc	60	J	2	100kA	10	-	-	-	5	10	#14-10 Sol #14-6 Str	75°C Cu	RDF60J-2-COMP	60	J	3	100kA	-	15	30	50	5	10	#14-10 Sol #14-6 Str	75°C Cu	RDF60J-3-COMP	60	J	4	100kA	-	15	30	50	5	10	#14-10 Sol #14-6 Str	75°C Cu	RDF60J-4-COMP	* DC Ratings use two poles in series.											
							Amp Rating	Fuse Class	Number of Poles	SCCR	Max Horsepower Rating					DC*		Wire Size	Wire Type	Part Number																																																				
			1-Phase 220/240Vac	220/240Vac	440/480Vac	600 Vac					125 Vdc	250 Vdc																																																												
	60	J	2	100kA	10	-	-	-	5	10	#14-10 Sol #14-6 Str	75°C Cu	RDF60J-2-COMP																																																											
	60	J	3	100kA	-	15	30	50	5	10	#14-10 Sol #14-6 Str	75°C Cu	RDF60J-3-COMP																																																											
	60	J	4	100kA	-	15	30	50	5	10	#14-10 Sol #14-6 Str	75°C Cu	RDF60J-4-COMP																																																											
	+																																																																							
	Direct Mount Handle - mounts directly to switch, no shaft required <table border="1"> <thead> <tr> <th>For Switch Part Number</th> <th>Color</th> <th>Test Function</th> <th>Padlockable</th> <th>Part Number</th> </tr> </thead> <tbody> <tr> <td>All Switches</td> <td>Black</td> <td>Y</td> <td>Y - On Switch</td> <td>DIR-07</td> </tr> </tbody> </table>												For Switch Part Number	Color	Test Function	Padlockable	Part Number	All Switches	Black	Y	Y - On Switch	DIR-07																																																		
	For Switch Part Number	Color	Test Function	Padlockable	Part Number																																																																			
All Switches	Black	Y	Y - On Switch	DIR-07																																																																				
Select for Standard Applications	 or  + 	External Front Operated Pistol Handles - shaft required																																																																						
		<table border="1"> <thead> <tr> <th>NEMA Type</th> <th>Color</th> <th>Test Function</th> <th>Padlockable</th> <th>Defeatable</th> <th>Part Number</th> </tr> </thead> <tbody> <tr> <td>1, 3R, 12</td> <td>Black</td> <td>N</td> <td>Y</td> <td>Y</td> <td>H12-05B</td> </tr> <tr> <td>1, 3R, 12</td> <td>Red/Yellow</td> <td>N</td> <td>Y</td> <td>Y</td> <td>H12-05R</td> </tr> <tr> <td>1, 3R, 4, 4X, 12</td> <td>Black</td> <td>N</td> <td>Y</td> <td>Y</td> <td>H4X-05B</td> </tr> <tr> <td>1, 3R, 4, 4X, 12</td> <td>Red/Yellow</td> <td>N</td> <td>Y</td> <td>Y</td> <td>H4X-05R</td> </tr> <tr> <td>1, 3R, 4, 4X, 12</td> <td>Black</td> <td>Y</td> <td>Y</td> <td>Y</td> <td>H4X-05TB</td> </tr> <tr> <td>1, 3R, 4, 4X, 12</td> <td>Red/Yellow</td> <td>Y</td> <td>Y</td> <td>Y</td> <td>H4X-05TR</td> </tr> </tbody> </table>						NEMA Type	Color	Test Function	Padlockable	Defeatable	Part Number	1, 3R, 12	Black	N	Y	Y	H12-05B	1, 3R, 12	Red/Yellow	N	Y	Y	H12-05R	1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-05B	1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-05R	1, 3R, 4, 4X, 12	Black	Y	Y	Y	H4X-05TB	1, 3R, 4, 4X, 12	Red/Yellow	Y	Y	Y	H4X-05TR																							
		NEMA Type	Color	Test Function	Padlockable	Defeatable	Part Number																																																																	
		1, 3R, 12	Black	N	Y	Y	H12-05B																																																																	
	1, 3R, 12	Red/Yellow	N	Y	Y	H12-05R																																																																		
	1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-05B																																																																		
	1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-05R																																																																		
	1, 3R, 4, 4X, 12	Black	Y	Y	Y	H4X-05TB																																																																		
	1, 3R, 4, 4X, 12	Red/Yellow	Y	Y	Y	H4X-05TR																																																																		
	Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required																																																																							
<table border="1"> <thead> <tr> <th>NEMA Type</th> <th>Color</th> <th>Test Function</th> <th>Padlockable</th> <th>Defeatable</th> <th>Part Number</th> </tr> </thead> <tbody> <tr> <td>1, 3R, 4, 4X, 12</td> <td>Black</td> <td>N</td> <td>Y</td> <td>Y</td> <td>H4X-05BHD</td> </tr> <tr> <td>1, 3R, 4, 4X, 12</td> <td>Red/Yellow</td> <td>N</td> <td>Y</td> <td>Y</td> <td>H4X-05RHD</td> </tr> </tbody> </table>						NEMA Type	Color	Test Function	Padlockable	Defeatable	Part Number	1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-05BHD	1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-05RHD																																																	
NEMA Type	Color	Test Function	Padlockable	Defeatable	Part Number																																																																			
1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-05BHD																																																																			
1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-05RHD																																																																			
External Right Side Operated Pistol Handles - shaft required																																																																								
<table border="1"> <thead> <tr> <th>NEMA Type</th> <th>Color</th> <th>Test Function</th> <th>Padlockable</th> <th>Defeatable</th> <th>Part Number</th> </tr> </thead> <tbody> <tr> <td>1, 3R, 4, 4X, 12</td> <td>Black</td> <td>N</td> <td>Y</td> <td>N/A</td> <td>H4X-05SB</td> </tr> <tr> <td>1, 3R, 4, 4X, 12</td> <td>Red/Yellow</td> <td>N</td> <td>Y</td> <td>N/A</td> <td>H4X-05SR</td> </tr> </tbody> </table>						NEMA Type	Color	Test Function	Padlockable	Defeatable	Part Number	1, 3R, 4, 4X, 12	Black	N	Y	N/A	H4X-05SB	1, 3R, 4, 4X, 12	Red/Yellow	N	Y	N/A	H4X-05SR																																																	
NEMA Type	Color	Test Function	Padlockable	Defeatable	Part Number																																																																			
1, 3R, 4, 4X, 12	Black	N	Y	N/A	H4X-05SB																																																																			
1, 3R, 4, 4X, 12	Red/Yellow	N	Y	N/A	H4X-05SR																																																																			
Shafts for Pistol Handles																																																																								
<table border="1"> <thead> <tr> <th>Length in (mm)</th> <th>Mounting Depth (X) in (mm)</th> <th>Part Number</th> </tr> </thead> <tbody> <tr> <td>7.9 (200)</td> <td>5.30~9.06 (135~230)</td> <td>SH5-200</td> </tr> <tr> <td>12.6 (320)</td> <td>5.30~13.78 (135~350)</td> <td>SH5-320</td> </tr> <tr> <td>15.7 (400)</td> <td>5.30~16.93 (135~430)</td> <td>SH5-400</td> </tr> </tbody> </table>						Length in (mm)	Mounting Depth (X) in (mm)	Part Number	7.9 (200)	5.30~9.06 (135~230)	SH5-200	12.6 (320)	5.30~13.78 (135~350)	SH5-320	15.7 (400)	5.30~16.93 (135~430)	SH5-400																																																							
Length in (mm)	Mounting Depth (X) in (mm)	Part Number																																																																						
7.9 (200)	5.30~9.06 (135~230)	SH5-200																																																																						
12.6 (320)	5.30~13.78 (135~350)	SH5-320																																																																						
15.7 (400)	5.30~16.93 (135~430)	SH5-400																																																																						
Select for Standard Applications		Flange Handle⁽¹⁾ - requires shaft operated mechanism or cable operated mechanism + cable																																																																						
		<table border="1"> <thead> <tr> <th>NEMA Type</th> <th>Flange Style</th> <th>Test Function</th> <th>Padlockable</th> <th>Defeatable</th> <th>Part Number</th> </tr> </thead> <tbody> <tr> <td>1, 3R, 4, 12</td> <td>Standard</td> <td>N</td> <td>Y</td> <td>Y</td> <td>FLH1</td> </tr> <tr> <td>1, 3R, 4, 4X, 12</td> <td>Chrome Plated</td> <td>N</td> <td>Y</td> <td>Y</td> <td>FLH2</td> </tr> </tbody> </table>						NEMA Type	Flange Style	Test Function	Padlockable	Defeatable	Part Number	1, 3R, 4, 12	Standard	N	Y	Y	FLH1	1, 3R, 4, 4X, 12	Chrome Plated	N	Y	Y	FLH2																																															
		NEMA Type	Flange Style	Test Function	Padlockable	Defeatable	Part Number																																																																	
		1, 3R, 4, 12	Standard	N	Y	Y	FLH1																																																																	
	1, 3R, 4, 4X, 12	Chrome Plated	N	Y	Y	FLH2																																																																		
	Shaft Operated Flange Mechanism⁽²⁾ - includes shaft																																																																							
	<table border="1"> <thead> <tr> <th>For Enclosure Depth - in (mm)</th> <th>Part Number</th> </tr> </thead> <tbody> <tr> <td>6-24 (152~613)</td> <td>FLRM</td> </tr> </tbody> </table>						For Enclosure Depth - in (mm)	Part Number	6-24 (152~613)	FLRM																																																														
	For Enclosure Depth - in (mm)	Part Number																																																																						
	6-24 (152~613)	FLRM																																																																						
	Cable Operated Flange Mechanism and Cable - must select Mechanism ⁽³⁾ <i>and</i> Cable ⁽⁴⁾																																																																							
<table border="1"> <thead> <tr> <th>Item / Length</th> <th>Part Number</th> </tr> </thead> <tbody> <tr> <td>Cable Mechanism</td> <td>FLCM</td> </tr> <tr> <td>36" (900mm) Cable</td> <td>FLC36</td> </tr> <tr> <td>60" (1500mm) Cable</td> <td>FLC60</td> </tr> <tr> <td>120" (3000mm) Cable</td> <td>FLC120</td> </tr> </tbody> </table>						Item / Length	Part Number	Cable Mechanism	FLCM	36" (900mm) Cable	FLC36	60" (1500mm) Cable	FLC60	120" (3000mm) Cable	FLC120																																																									
Item / Length	Part Number																																																																							
Cable Mechanism	FLCM																																																																							
36" (900mm) Cable	FLC36																																																																							
60" (1500mm) Cable	FLC60																																																																							
120" (3000mm) Cable	FLC120																																																																							
or																																																																								
																																																																								
NFPA Through the Door Handle Kit - to be used with selector handle or front pistol handle <table border="1"> <thead> <tr> <th>Color</th> <th>Test Function</th> <th>Padlockable</th> <th>Defeatable</th> <th>Part Number</th> </tr> </thead> <tbody> <tr> <td>Red</td> <td>N</td> <td>Y</td> <td>N</td> <td>H79-2</td> </tr> </tbody> </table>						Color	Test Function	Padlockable	Defeatable	Part Number	Red	N	Y	N	H79-2																																																									
Color	Test Function	Padlockable	Defeatable	Part Number																																																																				
Red	N	Y	N	H79-2																																																																				

UL 98 Fused Rotary Disconnect Switches—60A


Compact Class J

and ...							
Acc. AUX CONTACTS		Auxiliary Contacts					
		Contact Type	Number of Contacts	Continuous Amp Rating	Voltage Rating	Max Number of Aux Contacts per Switch	Part Number
		NO	1	10A	600Vac	4	BAC05
		NC	1	10A	600Vac	4	BAC06


Dimensions – in (mm)

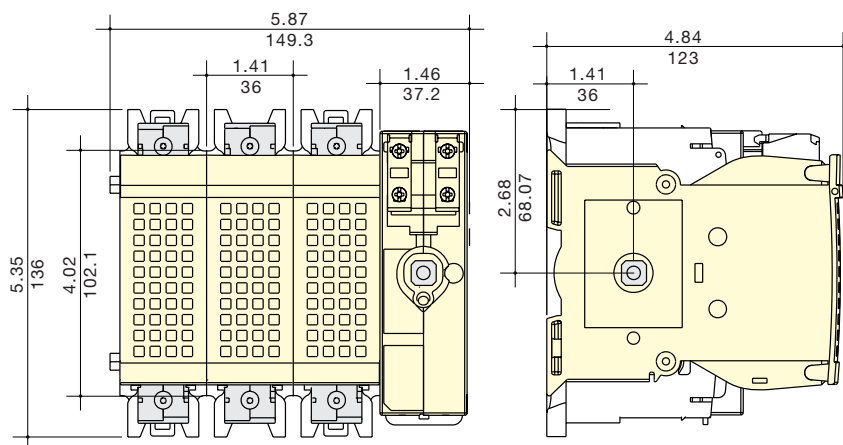

Direct Mount Handle



Flange Handle

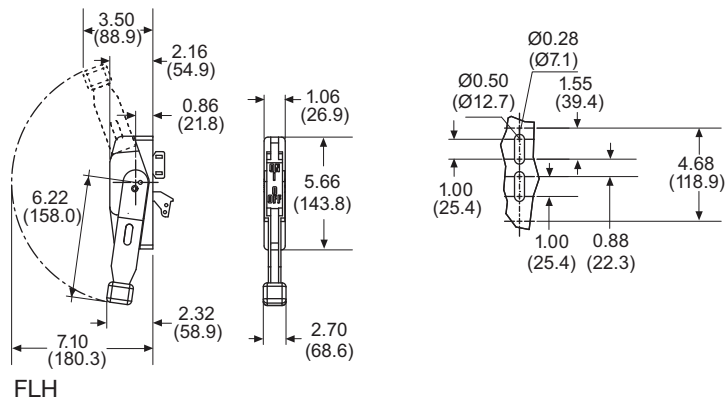


External Front & Right Side Pistol Handle

Handle Type

Direction of Front Operation

Direction of Right Side Operation

Door Drilling Layout

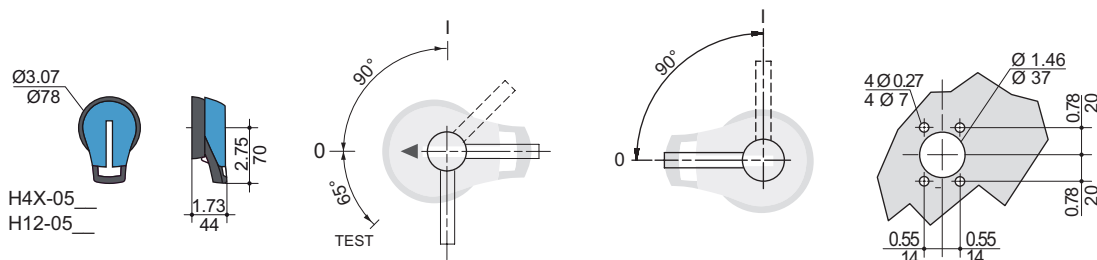

UL 98 Fused Rotary Disconnect Switches—60A

Standard Class J

For a Complete Assembly, Please Select:


SWITCH		Switch												
		Amp Rating	Fuse Class	Number of Poles	SCCR	Max Horsepower Rating						Wire Size	Wire Type	Part Number
						1-Phase 220/240Vac	220/240Vac	440/480Vac	600 Vac	125 Vdc	250 Vdc			
		60	J	2	200kA	10	-	-	-	5	10	#12-10 Sol #12-1 Str	75°C Cu	RDF60J-2
60	J	3	200kA	-	15	30	50	5	10	#12-10 Sol #12-1 Str	75°C Cu	RDF60J-3		
60	J	4	200kA	-	15	30	50	5	10	#12-10 Sol #12-1 Str	75°C Cu	RDF60J-4		
* DC Ratings use two poles in series.														
+														
HANDLE		Direct Mount Handle - mounts directly to switch, no shaft required												
		For Switch	Color		Test Function	Padlockable				Part Number				
		Part Number												
		All Switches	Black		Y	Y				DIR-07				
		OR												
		External Front Operated Pistol Handles - shaft required												
		NEMA Type	Color		Test Function	Padlockable	Defeatable	Part Number						
		1, 3R, 12	Black		N	Y	Y	H12-03B						
		1, 3R, 12	Red/Yellow		N	Y	Y	H12-03R						
		1, 3R, 4, 4X, 12	Black		N	Y	Y	H4X-06B						
1, 3R, 4, 4X, 12	Red/Yellow		N	Y	Y	H4X-06R								
1, 3R, 4, 4X, 12	Black		Y	Y	Y	H4X-06TB								
1, 3R, 4, 4X, 12	Red/Yellow		Y	Y	Y	H4X-06TR								
Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required														
NEMA Type	Color		Test Function	Padlockable	Defeatable	Part Number								
1, 3R, 4, 4X, 12	Black		N	Y	Y	H4X-06BHD								
1, 3R, 4, 4X, 12	Red/Yellow		N	Y	Y	H4X-06RHD								
External Right Side Operated Pistol Handles - shaft required														
NEMA Type	Color		Test Function	Padlockable	Defeatable	Part Number								
1, 3R, 4, 4X, 12	Black		N	Y	N/A	H4X-06SB								
1, 3R, 4, 4X, 12	Red/Yellow		N	Y	N/A	H4X-06SR								
Shafts for Pistol Handles														
Length in (mm)	Mounting Depth (X) in (mm)							Part Number						
7.9 (200)	5.30~9.06 (135~230)							SH5-200						
12.6 (320)	5.30~13.78 (135~350)							SH5-320						
15.7 (400)	5.30~16.93 (135~430)							SH5-400						
OR														
   	Flange Handle⁽¹⁾ - requires shaft operated mechanism or cable operated mechanism + cable													
	NEMA Type	Flange Style		Test Function	Padlockable	Defeatable	Part Number							
	1, 3R, 4, 12	Standard		N	Y	Y	FLH1							
	1, 3R, 4, 4X, 12	Chrome Plated		N	Y	Y	FLH2							
	Shaft Operated Flange Mechanism⁽²⁾ - includes shaft													
	For Enclosure Depth in (mm)							Part Number						
	6~24 (152~613)							FLRM						
	Cable Operated Flange Mechanism and Cable - must select Mechanism ⁽³⁾ and Cable ⁽⁴⁾													
	Item / Length							Part Number						
	Cable Mechanism							FLCM						
36" (900mm) Cable							FLC36							
60" (1500mm) Cable							FLC60							
120" (3000mm) Cable							FLC120							

UL 98 Fused Rotary Disconnect Switches—60A


Standard Class J

Select	NFPA HANDLE	or					
		NFPA Through the Door Handle Kit - to be used with front pistol handle					
		Color		Test Function	Padlockable	Defeatable	Part Number
		Red		N	Y	N	H79-2
and ...							
Acc.	AUX CONTACTS	Auxiliary Contacts					
		Contact Type	Number of Contacts	Continuous Amp Rating	Voltage Rating	Max Number of Aux Contacts per Switch	Part Number
		NO	1	10A	600Vac	4	BAC05
		NC	1	10A	600Vac	4	BAC06

Dimensions – in (mm)

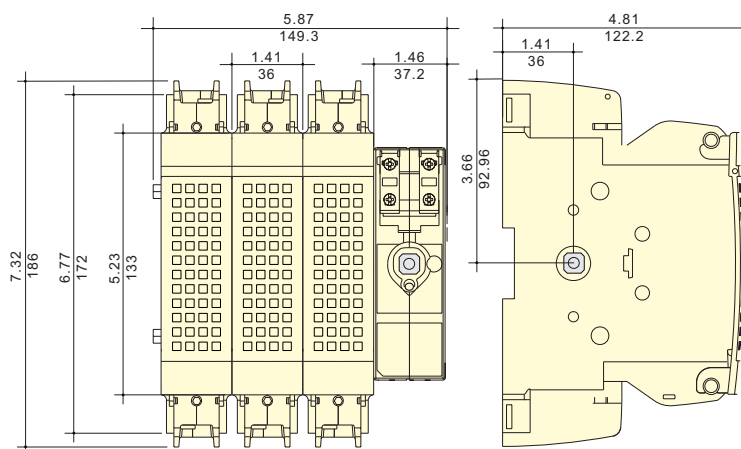


Direct Mount Handle



DIR-07

Flange Handle

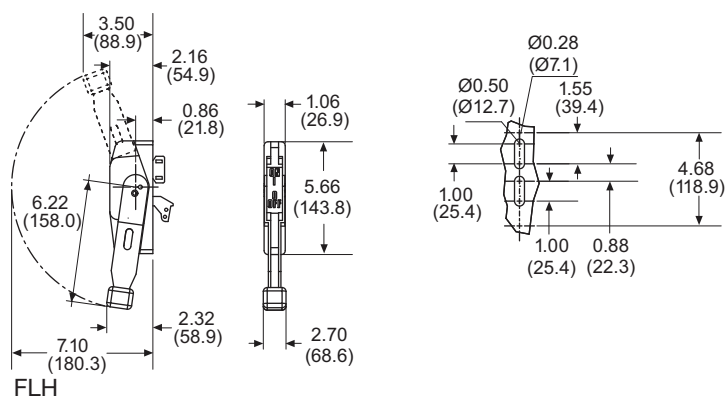

FLH_


External Front and Right Side Pistol Handle

Handle Type




Direction of Front Operation

Direction of Right Side Operation

Door Drilling Layout



H4X-06
H12-03



UL 98 Fused Rotary Disconnect Switches—100A

Standard Class J

For a Complete Assembly, Please Select:


SWITCH	Switch												
	Amp Rating	Fuse Class	Number of Poles	SCCR	Max Horsepower Rating						Wire Size	Wire Type	Part Number
					1-Phase 220/240Vac	3-Phase			DC*				
						220/240Vac	440/480Vac	600 Vac	125 Vdc	250 Vdc			
	100	J	2	200kA	10	-	-	-	7.5	20	#12-10 Sol #12-1 Str	75°C Cu	RDF100J-2
	100	J	3	200kA	-	30	60	75	7.5	20	#12-10 Sol #12-1 Str	75°C Cu	RDF100J-3
	100	J	4	200kA	-	30	60	75	7.5	20	#12-10 Sol #12-1 Str	75°C Cu	RDF100J-4
* DC Ratings use two poles in series.													
+													
	Direct Mount Handle - mounts directly to switch, no shaft required												
	For Switch Part Number	Color		Test Function	Padlockable					Part Number			
	All Switches	Black		Y	Y					DIR-07			
or													
 or  + 	External Front Operated Pistol Handles - shaft required												
	NEMA Type	Color		Test Function	Padlockable		Defeatable		Part Number				
	1, 3R, 12	Black		N	Y		Y		H12-03B				
	1, 3R, 12	Red/Yellow		N	Y		Y		H12-03R				
	1, 3R, 4, 4X, 12	Black		N	Y		Y		H4X-06B				
	1, 3R, 4, 4X, 12	Red/Yellow		N	Y		Y		H4X-06R				
	1, 3R, 4, 4X, 12	Black		Y	Y		Y		H4X-06TB				
	1, 3R, 4, 4X, 12	Red/Yellow		Y	Y		Y		H4X-06TR				
	Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required												
	NEMA Type	Color		Test Function	Padlockable		Defeatable		Part Number				
	1, 3R, 4, 4X, 12	Black		N	Y		Y		H4X-06BHD				
	1, 3R, 4, 4X, 12	Red/Yellow		N	Y		Y		H4X-06RHD				
	External Right Side Operated Pistol Handles - shaft required												
	NEMA Type	Color		Test Function	Padlockable		Defeatable		Part Number				
	1, 3R, 4, 4X, 12	Black		N	Y		N/A		H4X-06SB				
1, 3R, 4, 4X, 12	Red/Yellow		N	Y		N/A		H4X-06SR					
Shafts for Pistol Handles													
Length in (mm)	Mounting Depth (X) in (mm)								Part Number				
7.9 (200)	5.30~9.06 (135~230)								SH5-200				
12.6 (320)	5.30~13.78 (135~350)								SH5-320				
15.7 (400)	5.30~16.93 (135~430)								SH5-400				
or													
   	Flange Handle⁽¹⁾ - requires shaft operated mechanism or cable operated mechanism + cable												
	NEMA Type	Flange Style		Test Function	Padlockable		Defeatable		Part Number				
	1, 3R, 4, 12	Standard		N	Y		Y		FLH1				
	1, 3R, 4, 4X, 12	Chrome Plated		N	Y		Y		FLH2				
	Shaft Operated Flange Mechanism⁽²⁾ - includes shaft												
	For Enclosure Depth in (mm)										Part Number		
	6~24 (152~613)										FLRM		
	Cable Operated Flange Mechanism and Cable - must select Mechanism ⁽³⁾ and Cable ⁽⁴⁾												
	Item / Length										Part Number		
	Cable Mechanism										FLCM		
36" (900mm) Cable										FLC36			
60" (1500mm) Cable										FLC60			
120" (3000mm) Cable										FLC120			

UL 98 Fused Rotary Disconnect Switches—200 & 400A

Standard Class J

For a Complete Assembly, Please Select:

SWITCH + LUGS



+



Switch										
Amp Rating	Fuse Class	Number of Poles	SCCR	Max Horsepower Rating				DC*		Part Number
				1-Phase 220/240Vac	220/240Vac	3-Phase 440/480Vac	600 Vac	125 Vdc	250 Vdc	
200	J	2	200kA	10	-	-	-	-	-	RDF200J-2
200	J	3	200kA	-	60	125	150	-	-	RDF200J-3
200	J	4	200kA	-	60	125	150	-	-	RDF200J-4
400	J	2	200kA	10	-	-	-	20	50	RDF400J-2
400	J	3	200kA	-	125	250	350	20	50	RDF400J-3
400	J	4	200kA	-	125	250	350	20	50	RDF400J-4

* DC Ratings use two poles in series.

Terminal Lug Kit					
Switch Amp Rating	Number of Poles	Lugs Per Kit	Wire Range	Wire Type	Part Number
200	2	2	#6-300MCM	75°C Cu/Al	LUG1-2
200	3	3	#6-300MCM	75°C Cu/Al	LUG1-3
200	4	4	#6-300MCM	75°C Cu/Al	LUG1-4
400	2	2	#4-600MCM or Dual 1/0-250MCM	75°C Cu/Al	LUG2-2
400	3	3	#4-600MCM or Dual 1/0-250MCM	75°C Cu/Al	LUG2-3
400	4	4	#4-600MCM or Dual 1/0-250MCM	75°C Cu/Al	LUG2-4

+

HANDLE



OR



or



+




Direct Mount Handle - mounts directly to switch, no shaft required					
For Switch Part Number	Color	Test Function	Padlockable		Part Number
All Switches	Black	Y	Y		DIR-07

External Front Operated Pistol Handles - shaft required					
NEMA Type	Color	Test Function	Padlockable	Defeatable	Part Number
1, 3R, 12	Black	N	Y	Y	H12-03B
1, 3R, 12	Red/Yellow	N	Y	Y	H12-03R
1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-06B
1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-06R
1, 3R, 4, 4X, 12	Black	Y	Y	Y	H4X-06TB
1, 3R, 4, 4X, 12	Red/Yellow	Y	Y	Y	H4X-06TR

Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required					
NEMA Type	Color	Test Function	Padlockable	Defeatable	Part Number
1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-06BHD
1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-06RHD


External Right Side Operated Pistol Handles - shaft required					
NEMA Type	Color	Test Function	Padlockable	Defeatable	Part Number
1, 3R, 4, 4X, 12	Black	N	Y	N/A	H4X-06SB
1, 3R, 4, 4X, 12	Red/Yellow	N	Y	N/A	H4X-06SR

Shafts for Pistol Handles			
Length in (mm)	Mounting Depth (X) in (mm)	Part Number	
7.9 (200)	200A: 5.70-9.06 (145-230) 400A: 7.87-10.24 (200-260)		SH5-200
12.6 (320)	200A: 5.70-13.78 (145-350) 400A: 7.87-16.93 (200-380)		SH5-320
15.7 (400)	200A: 5.70-16.93 (145-430) 400A: 7.87-18.10 (200-460)		SH5-400

UL 98 Fused Rotary Disconnect Switches—200 & 400A


Standard Class J

Direct Mount Handle




DIR-07

Flange Handle

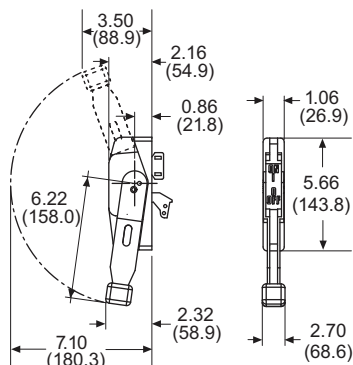

FLH_




External Front & Right Side Pistol Handle

Handle Type




Direction of Front Operation

Direction of Right Side Operation



Door Drilling Layout



H4X-06
H12-03



Terminal Lugs



200A

LUG1-__



400A

LUG2-__



Open & Enclosed Rotary Disconnect Switches In-Stock and Ship Within 24 Hours

The Cooper Bussmann QuikShip Everyday Service ensures the most common open and enclosed rotary disconnect switches ship within 24 hours to help you meet project timelines.

Contact your Cooper Bussmann representative for details.




QuikShip®
Everyday

www.cooperbussmann.com/Disconnects

UL 98 Fused Rotary Disconnect Switches—600 & 800A

Standard Class J & Class L

For a Complete Assembly, Please Select:


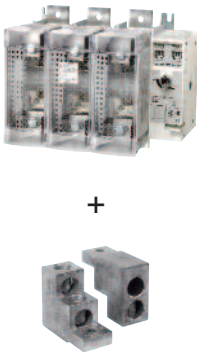
Select for Standard Applications		Switch							
		Amp Rating	Fuse Class	Number of Poles	SCCR	Max Horsepower Rating, 3-Phase			Part Number
						220/240Vac	440/480Vac	600Vac	
		600	J	2	200kA	-	-	-	RDF600J-2
		600	J	3	200kA	200	400	500	RDF600J-3
		600	J	4	200kA	200	400	500	RDF600J-4
		800	L	2	200kA	-	-	-	RDF800L-2
		800	L	3	200kA	200	500	500	RDF800L-3
		800	L	4	200kA	200	500	500	RDF800L-4
		Terminal Lug Kit							
Switch Amp Rating	Number of Poles	Lugs Per Kit	Wire Range			Wire Type	Part Number		
600-800	2	2	(2) #2-600MCM			75°C Cu/Al	LUG5-2		
600-800	3	3	(2) #2-600MCM			75°C Cu/Al	LUG5-3		
600-800	4	4	(2) #2-600MCM			75°C Cu/Al	LUG5-4		
Accessories	AUX CONTACTS	Direct Mount Handle - mounts directly to switch, no shaft required							
		For Switch Part Number		Color	Test Function	Padlockable		Part Number	
		All Switches		Black	Y	Y		DIR-08	
		OR							
		External Front Operated Pistol Handles - shaft required							
		NEMA Type		Color	Test Function	Padlockable	Defeatable	Part Number	
		1, 3R, 4, 4X, 12		Black	N	Y	Y	H4X-07B	
		1, 3R, 4, 4X, 12		Red/Yellow	N	Y	Y	H4X-07R	
		Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required							
		NEMA Type		Color	Test Function	Padlockable	Defeatable	Part Number	
1, 3R, 4, 4X, 12		Black	N	Y	Y	H4X-07BHD			
1, 3R, 4, 4X, 12		Red/Yellow	N	Y	Y	H4X-07RHD			
Accessories	SHROUDS	Shafts for Pistol Handles							
		Length in (mm)	Mounting Depth (X) in (mm)				Part Number		
		7.9 (200)	10.63~11.97 (270~304)				SH7-200		
		12.6 (320)	10.63~16.69 (270~424)				SH7-320		
		15.7 (400)	10.63~19.84 (270~504)				SH7-400		
		OR							
		NFPA Through the Door Handle Kit - to be used with front pistol handle							
		For Switch Part Number		Color	Test Function	Padlockable	Defeatable	Part Number	
		All Switches		Red	N	Y	N	H79-4	
		and ...							
Auxiliary Contacts									
Contact Type	Number of Contacts	Continuous Amp Rating	Voltage Rating	Max Number of Aux Contacts per Switch		Part Number			
NO	1	10A	600Vac	8		BAC05			
NC	1	10A	600Vac	8		BAC06			
and ...									
Terminal Shrouds - includes terminal shroud for lineside or loadside									
Switch Amp Rating	Number of Poles					Part Number			
600-800	2					TSH10-2TB			
600-800	3					TSH10-3TB			
600-800	4					TSH10-4TB			

UL 98 Fused Rotary Disconnect Switches—600 & 800A


Standard Class J & Class L

Dimensions – in (mm)

- RDF600J-3 • RDF800L-3

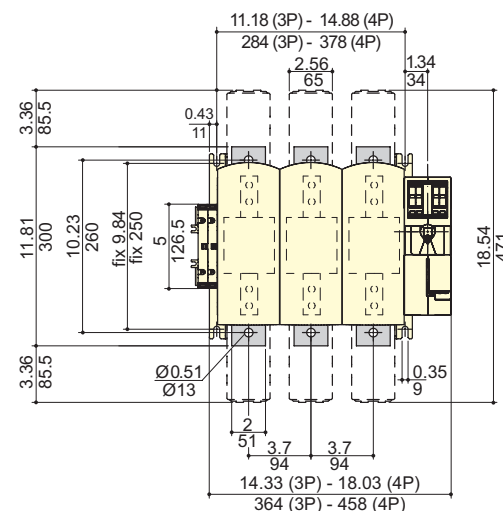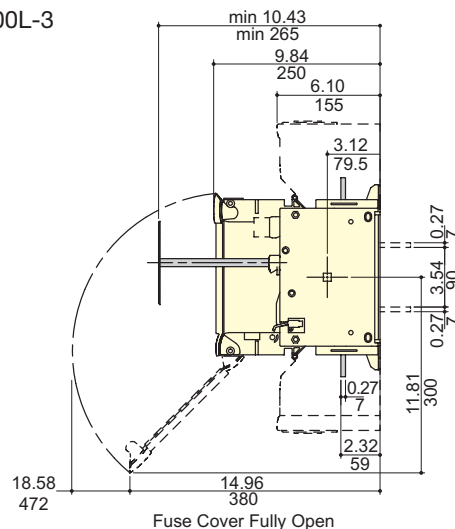


Direct Mount Handle




External Front Pistol Handle


Handle Type




Direction of Front Operation



Door Drilling Layout



Terminal Lugs



600 to 800A

LUG5-__

UL 98 Non-Fused Rotary Disconnect Switches—30 to 1200A

Description

Cooper Bussmann UL 98 non-fused rotary disconnect switches are versatile switches that “break” and “make” power circuits ON and OFF load.

Features

- Make and break power under load
- Up to 200kA SCCR
- DIN-Rail or panel mount (30-100A)
- Disconnect switches are front, right side and direct handle operable (30-100A)
- Finger-safe (30-100A)
- Fully visualized breaking (100-1200A)


Agency Information

- UL98, Guide WHTY, File E155130
- CSA 22.2 No. 4, File 257020
- Conforms with IEC 60947-3

Online Resources

Visit www.cooperbussmann.com/Disconnects for:

- CAD Drawings
- Instruction Sheets
- UL Information

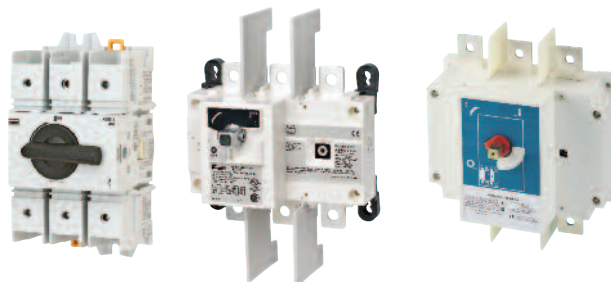

QuikShip 
Everyday

QuikShip Everyday Service ships the most common part numbers within 24 hours. Contact your Bussmann representative for details.

Related Cooper Bussmann Products

Fuse Blocks	Data Sheet #
Modular Knifeblade Fuse Blocks 100-600A	3192
Fuses Holders	
CH Series Class CC, Midget & 10x38 0-30A	3185
Finger-Safe Optima Series 0-30A	1102
Optima™ Protection Modules 0-30A	1109
CH Series Class J 0-60A	2144

IEC Electrical Specifications



RD30-3



RD200-3



RD600-3

Part Number	RD30-3	RD60-3	RD100-3	RD100-3-SCCR	RD200-3	RD400-3	RD600-3	RD800-3	RD1000-3	RD1200-3
3-Pole	—	—	—	—	—	—	—	—	—	—
4-Pole	—	—	—	—	RD200-4	RD400-4	RD600-4	RD800-4	RD1000-4	RD1200-4
Thermal Current I_{th} @ 40°C (A)	30	60	100	—	—	—	—	—	—	—
Rated insulation voltage U_i (V)	800	800	800	—	—	—	1000	1000	1000	1000
Rated impulse withstand voltage U_{imp} (kV)	8	8	8	—	—	—	12	12	12	12
Rated Operation Currents I_e (A)										
Load Duty Category	A ⁽¹⁾	A ⁽¹⁾	A ⁽¹⁾	—	—	—	A ⁽¹⁾	A ⁽¹⁾	A ⁽¹⁾	A ⁽¹⁾
Rated Voltage	—	—	—	—	—	—	—	—	—	—
400Vac AC-22 A	32	63	100	—	—	—	630	800	1000	1200
400Vac AC-23 A	32	63	100	—	—	—	630	800	1000	1000
690Vac AC-22 A	32	63	80	—	—	—	500	630	630	630
690Vac AC-23 A	32	63	63	—	—	—	200	400	400	400
Operational Power (Vac) in AC-23 (kW)										
400V w/o prebreak AC ⁽¹⁾⁽²⁾	15	30	45	—	—	—	355	450	560	560
500V w/o prebreak AC ⁽¹⁾⁽²⁾	15	30	45	—	—	—	450	560	560	560
690V w/o prebreak AC ⁽¹⁾⁽²⁾	18.5	30	45	—	—	—	185	400	400	400
Overload Capacity (U_e 415Vac)										
Rated short-time making capacity I_{cm} (kA peak) ⁽³⁾	12	12	12	—	—	—	48	75	48	75
Fuse Protected Short-Circuit Withstand (kA rms prospective)										
Short-Circuit Current (kA) ⁽³⁾	50	50	25	—	—	—	100	100	100	100
Associated Fuse Rating (A) ⁽³⁾	32	63	100	—	—	—	630	800	1000	1250
Connection										
Minimum Cu cable cross section (mm ²)	2.5	2.5	10	—	—	—	2x150	2x185	2x240	—
Minimum Cu busbar section (mm ²)	—	—	—	—	—	—	2x30x5	2x40x5	2x50x5	2x60x5
Maximum Cu cable section (mm ²)	70	70	70	—	—	—	—	—	—	—

(1) A/B: Category with index A = frequent operation; category with index B = infrequent operation.

(2) The power value is given for information only; the current values vary from one manufacturer to another.

(3) For a rated operating voltage, U_e = 400Vac.

UL 98 Non-Fused Rotary Disconnect Switches—30 to 1200A

UL Electrical Specifications



RD30-3



RD200-3




RD600-3

Part Number	RD30-3	RD60-3	RD100-3	RD100-3-SCCR	RD200-3	RD400-3	RD600-3	RD800-3	RD1000-3	RD1200-3
3-Pole	—	—	—	—	RD200-4	RD400-4	RD600-4	RD800-4	RD1000-4	RD1200-4
4-Pole	—	—	—	—	—	—	—	—	—	—
UL Standard	UL 98	UL 98	UL 98	UL 98	UL 98	UL 98	UL 98	UL 98	UL 98	UL 98
Max Ampacity	30A	60A	100A	100A	200A	400A	600A	800A	1000A	1200A
Switch Type	Compact	Compact	Compact	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Handle Operation	Front/Side	Front/Side	Front/Side	Front	Front	Front	Front	Front	Front	Front
UL Electrical Ratings										
Max Voltage (AC)	600Vac	600Vac	600Vac	600Vac	600Vac	600Vac	600Vac	600Vac	600Vac	600Vac
Max Voltage (DC)	—	—	—	250Vdc	250Vdc	—	250Vdc	—	—	—
Maximum AC Horsepower Ratings										
1-Phase, 120Vac	2	3	5	—	—	—	—	—	—	—
1-Phase, 240Vac	5	10	10	10	10	—	—	—	—	—
3-Phase, 240Vac	10	20	20	30	75	125	200	200	200	200
3-Phase, 480Vac	20	40	50	75	150	250	400	500	500	500
3-Phase, 600Vac	25	50	50	100	200	350	350	500	500	500
DC Horsepower Ratings										
125Vdc	—	—	—	—	—	—	20	—	—	—
250Vdc	—	—	—	—	—	—	50	—	—	—
Electrical Characteristics										
SCCR with Fuse	100kA	100kA	25kA/100kA*	200kA	200kA	200kA	200kA	100kA	100kA	100kA
Fuse Class	J	J	J	J	J	J	J	L	L	L
Max. Fuse Rating	30A	60A	100A	100A	200A	400A	600A	800A	1000A	1200A
Terminal Lugs/Kits	Integral	Integral	Integral	•	•	•	•	•	•	•
Lug Mounting Torque - Lb-In (N•m)	—	—	—	160 (18)	160 (18)	LUG2- 310 (35) LUG3- 398 (45)	310 (35)	310 (35)	310 (35)	310 (35)
Wire Type	75°C Cu	75°C Cu	75°C Cu	75°C Cu/Al	75°C Cu/Al	75°C Cu/Al	75°C Cu/Al	75°C Cu/Al	75°C Cu/Al	75°C Cu/Al
Wire Range & Torque - Lb-In (N•m)										
Solid	#12-10 35.4 (4)	#12-10 35.4 (4)	#12-10 35.4 (4)	—	—	—	—	—	—	—
Stranded	#10-1 35.4 (4) 1/0 39.8 (4.5) 2/0 44.3 (5)	#10-1 35.4 (4) 1/0 39.8 (4.5) 2/0 44.3 (5)	#10-1 35.4 (4) 1/0 39.8 (4.5) 2/0 44.3 (5)	#6-300MCM 275 (31)	#6-300MCM 275 (31)	LUG2- #4-600MCM 550 (62) Dual 1/0-250MCM 550 (62) LUG3- (2) #6-2 200 (22.6) (2) #1-350MCM 375 (42.4)	(2) #2-600MCM 375 (42.4)	(4) #2-600MCM 375 (42.4)	(4) #2-600MCM 375 (42.4)	(4) #2-600MCM 375 (42.4)
Mechanical Characteristics										
Endurances/Cycles	10,000	10,000	10,000	10,000	8000	6000	6000	3500	3500	3500
Physical Characteristics										
Dimensions										
See drawings on product pages										
Weight - Lbs (KG)										
3-Pole	1.3 (0.6)	1.3 (0.6)	1.3 (0.6)	4.2 (1.91)	4.2 (1.91)	10.0 (4.6)	18.1 (8.2)	19.6 (8.9)	19.6 (8.9)	19.6 (8.9)
4-Pole	—	—	—	—	5.0 (2.3)	12.3 (5.6)	23.9 (10.9)	25.3 (11.5)	25.3 (11.5)	25.3 (11.5)
Environmental										
Operating Temperature	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C
Flammability Rating	UL 94-V0	UL 94-V0	UL 94-V0	UL 94-V0	UL 94-V0	UL 94-V0	UL 94-V0	UL 94-V0	UL 94-V0	UL 94-V0
Accessories										
Lug Kit Part #										
3-Pole	Integral	Integral	Integral	•	•	•	•	•	•	•
4-Pole	—	—	—	—	•	•	•	•	•	•
Handles										
NEMA 1, 3R, 12	•	•	•	•	•	•	—	—	—	—
NEMA 1, 3R, 4, 4X, 12	•	•	•	•	•	•	•	•	•	•
Direct	•	•	•	•	•	•	•	•	•	•
Front Pistol	—	—	—	•	•	•	•	•	•	•
Front or Side Selector	•	•	•	—	—	—	—	—	—	—
Shaft c/s - mm	5x5	5x5	5x5	10x10	10x10	10x10	12x12	12x12	12x12	12x12
Shaft Guide	•	•	•	•	•	•	•	•	•	•
Shrouds	•	•	•	•	•	•	•	•	•	•
Additional Pole Accessory	•	•	•	—	—	—	—	—	—	—
Auxiliary Contacts										
NO + NC	•	•	•	•	•	•	•	•	•	•
(2) NO	•	•	•	—	—	—	—	—	—	—

- Available, see product page for details and part numbers.
- Not available.
- * 25kA @ 600Vac, 100kA @ 480Vac.


UL 98 Non-Fused Rotary Disconnect Switches—30, 60 and Compact 100A

For a Complete Assembly, Please Select:

Select for Standard Applications		Switch										
		Switch Amp Rating	No. of Poles	SCCR	Max Horsepower Rating					Wire Size	Wire Type	Part Number
					1-Phase		3-Phase					
					120 Vac	220/240Vac	220/240Vac	440/480Vac	600 Vac			
		30	3	100kA	2	5	10	20	25	#10-2/0 Str #12-10 Sol	75°C Cu	RD30-3
	60	3	100kA	3	10	20	40	50	#10-2/0 Str #12-10 Sol	75°C Cu	RD60-3	
	100	3	25/100kA*	5	10	20	50	50	#10-2/0 Str #12-10 Sol	75°C Cu	RD100-3	
	* 100kA @480Vac, 25kA @ 600Vac.											
	+											
		Direct Mount Handle - mounts directly to switch, no shaft required										
For Switch Part Number		Color		Test Function	Padlockable		Part Number					
All SwitchesBlackN Y - On SwitchDIR-02												
or												
 +  + 	External Front or Right Side Operated Selector Handles - shaft required											
	NEMA Type	Color	Handle Length	Test Function	Padlockable	Defeatable	Part Number					
	1, 3R, 4, 4X, 12	Black	Short	N	Y	Y	H4X-01B ⁽¹⁾					
	1, 3R, 4, 4X, 12	Red/Yellow	Short	N	Y	Y	H4X-01R ⁽¹⁾					
	1, 3R, 4, 4X, 12	Black	Long	N	Y	Y	H4X-02B ⁽²⁾					
	1, 3R, 4, 4X, 12	Red/Yellow	Long	N	Y	Y	H4X-02R ⁽²⁾					
	Shafts for Selector Handles											
	Length in (mm)	Mounting Depth (X) in (mm)		Part Number								
	5.9 (150)	3.50~7.60 (89~193)		SH4-150								
	7.9 (200)	3.50~9.50 (89~241)		SH4-200								
	12.6 (320)	3.50~14.9 (89~378)		SH4-320								
	Shaft Guide											
Part Number												
Required for 12.6" (320mm) long shafts, optional for other lengthsSH-GUIDE1												
and ...												
	Auxiliary Contacts											
	Contact Type	Number of Contacts	Continuous Amp Rating	Voltage Rating	Max Number of Aux Contacts per Switch	Part Number						
	NO + NC	1 of each	10A	240Vac	4	BAC01						
	NO	2	10A	240Vac	4	BAC02						
and ...												
	Terminal Shrouds - includes terminal shroud for both lineside and loadside											
	Switch Amp Rating		Number of Poles		Location on Switch	Part Number						
	All Switches		1 (for switched 4 th pole)		Lineside and Loadside	TSH3-1TB						
	All Switches		3		Lineside and Loadside	TSH3-3TB						
and ...												
	Switched 4 th Pole - converts 3-pole switch to 4-pole											
	Switch Amp Rating					Part Number						
	30					POLE98-30						
	60					POLE98-60						
	100					POLE98-100						



Auxiliary Contact Configurations




Possible 4th Pole Configurations


UL 98 Non-Fused Rotary Disconnect Switches—30, 60 and Compact 100A

Dimensions - in (mm)


Direct Handle Operation

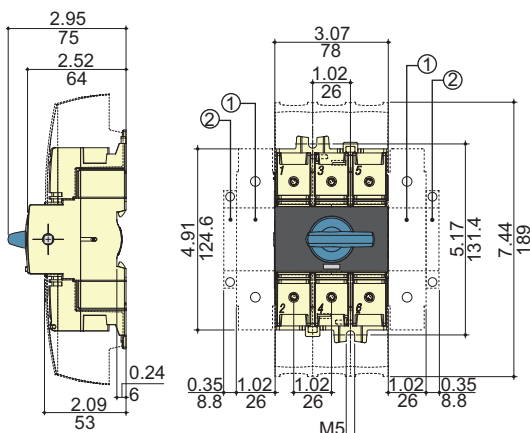

External Front Operation

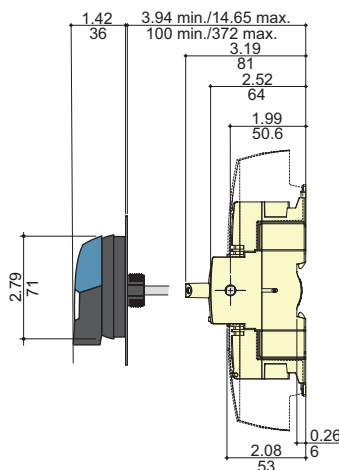


External Right Side Operation

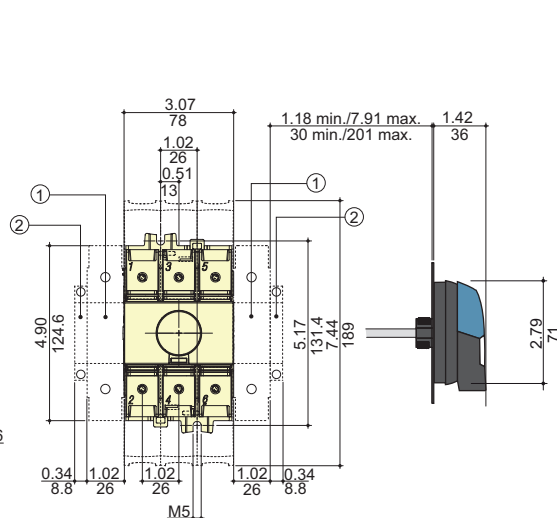


1. Position for 1 switched 4th pole (1 per device max.) or 1 auxiliary contact.
 2. Position for 1 auxiliary contact only.
- Note: Maximum of 4 auxiliary contacts, or 3 auxiliary contacts + one switched 4th pole.

External Front or Right Side Operated Selector Handle


Handle Type

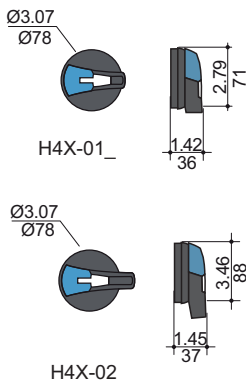


Direction of Front Operation



Direction of Right Side Operation




Door Drilling Layouts

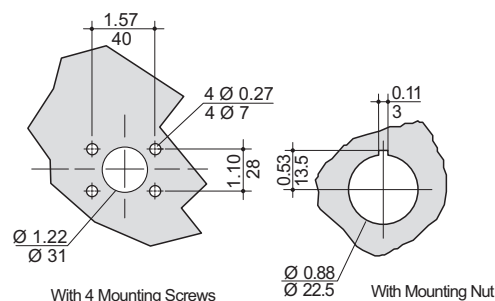

UL 98 Non-Fused Rotary Disconnect Switches—100, 200 and 400A


For a Complete Assembly, Please Select:

Switch + Lugs  + 	Switch							
	Switch Amp Rating	No. of Poles	SCCR	Max Horsepower Rating				Part Number
				1-Phase 220/240Vac	220/240Vac	3-Phase 440/480Vac	600 Vac	
	100	3	200kA	10	30	75	100	RD100-3-SCCR
	200	3	200kA	10	75	150	200	RD200-3
	200	4	200kA	10	75	150	200	RD200-4
	400	3	200kA	-	125	250	350	RD400-3
	400	4	200kA	-	125	250	350	RD400-4
	Terminal Lug Kit							
	Switch Amp Rating	No. of Poles	Lugs Per Kit	Wire Range		Wire Type	Part Number	
100-200	2	2	#6-300MCM		75°C Cu/Al	LUG1-2		
100-200	3	3	#6-300MCM		75°C Cu/Al	LUG1-3		
100-200	4	4	#6-300MCM		75°C Cu/Al	LUG1-4		
400	2	2	#4-600MCM or Dual 1/0-250MCM		75°C Cu/Al	LUG2-2		
400	3	3	#4-600MCM or Dual 1/0-250MCM		75°C Cu/Al	LUG2-3		
400	4	4	#4-600MCM or Dual 1/0-250MCM		75°C Cu/Al	LUG2-4		
400	2	2	(2) #6-350MCM		75°C Cu/Al	LUG3-2		
400	3	3	(2) #6-350MCM		75°C Cu/Al	LUG3-3		
400	4	4	(2) #6-350MCM		75°C Cu/Al	LUG3-4		
Handle  or  or  +  + 	Direct Mount Handle - mounts directly to switch, no shaft required							
	For Switch Part Number	Color	Test Function	Padlockable			Part Number	
	All Switches	Black	N	Y			DIR-03	
	or							
	External Front Operated Pistol Handles - shaft required							
	NEMA Type	Color	Test Function	Padlockable	Defeatable	Part Number		
	1, 3R, 12	Black	N	Y	Y	H12-03B		
	1, 3R, 12	Red/Yellow	N	Y	Y	H12-03R		
	1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-06B		
	1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-06R		
Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required								
NEMA Type	Color	Test Function	Padlockable	Defeatable	Part Number			
1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-06BHD			
1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-06RHD			
Shafts for Pistol Handles								
Length in (mm)	Mounting Depth (X) in (mm)					Part Number		
7.9 (200)	5.31~10.43 (135~265)					SH5-200		
12.6 (320)	5.31~15.16 (135~385)					SH5-320		
15.7 (400)	5.31~18.31 (135~465)					SH5-400		
Shaft Guide								
						Part Number		
Required for 15.7" (400mm) long shafts, optional for other lengths						SH-GUIDE2		
Accessories AUX CONTACTS 	Auxiliary Contacts							
	Contact Type	Number of Contacts	Continuous Amp Rating	Voltage Rating	Max Number of Aux Contacts per Switch	Part Number		
	NO + NC	1 of each	10.1A	125-250Vac	2	BAC03*		
	NO + NC	1 of each	10.1A	125-250Vac	2	BAC04*		
	NO + NC	1 of each	1A	125Vac	2	BAC11*		
	NO + NC	1 of each	1A	125Vac	2	BAC12*		
	* For one auxiliary contact, install either BAC03 or BAC11. For two auxiliary contacts, install BAC03 + BAC04, or BAC11 + BAC12.							
	and ...							


UL 98 Non-Fused Rotary Disconnect Switches—100, 200 and 400A

Accessories		and ...			
		Terminal Shrouds - includes terminal shroud for lineside or loadside			
		Switch Amp Rating	Number of Poles	Location on Switch	Part Number
		100-200A	3	Lineside	TSH4-3T
		100-200A	3	Loadside	TSH4-3B
		100-200A	4	Lineside or Loadside	TSH4-4TB
		400A	3	Lineside	TSH5-3T
		400A	3	Loadside	TSH5-3B
		400A	4	Lineside or Loadside	TSH5-4TB

Dimensions - in (mm)

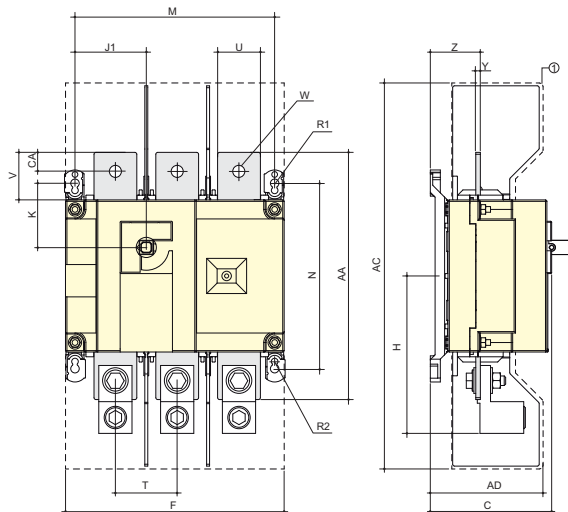


Terminal Lugs

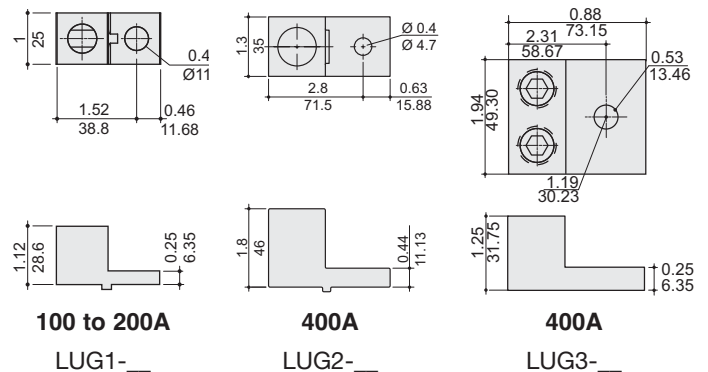

Switch Rating (A)	Overall Dimen. C	Terminal Shrouds		Switch Body						Switch Mounting					Connection							
		AC	AD	F 3p.	F 4p.	H	J1 3p.	J1 4p.	K	M 3p.	M 4p.	N	R1	R2	T	U	V	W	Y	Z	AA	AC
100	3.72 (94.6)	10.1 (256)	3.05 (77.5)	7.09 (180)	9.06 (230)	4.22 (107)	2.17 (55)	4.13 (105)	1.8 (45.6)	6.3 (160)	8.27 (210)	5.31 (135)	0.35 (9)	0.27 (7)	1.97 (50)	0.98 (25)	1.18 (30)	0.43 (11)	0.14 (3.5)	1.35 (34.4)	6.3 (160)	0.6 (15)
200	3.72 (94.6)	10.1 (256)	3.05 (77.5)	7.09 (180)	9.06 (230)	4.22 (107)	2.17 (55)	4.13 (105)	1.8 (45.6)	6.3 (160)	8.27 (210)	5.31 (135)	0.35 (9)	0.27 (7)	1.97 (50)	0.98 (25)	1.18 (30)	0.43 (11)	0.14 (3.5)	1.35 (34.4)	6.3 (160)	0.6 (15)
400	4.92 (128)	16 (406)	4.15 (115)	9.05 (230)	11.4 (290)	6.53 (166)	2.95 (75)	5.31 (135)	2.65 (67.5)	8.26 (210)	10.6 (270)	7.67 (195)	0.35 (9)	0.27 (7)	2.56 (65)	1.77 (45)	1.97 (50)	0.43 (13)	0.2 (5)	2.08 (53)	10.2 (260)	0.8 (20)


Direct Mount Handle

External Front Handle




DIR-03


Handle Type



Direction of Front Operation





Door Drilling Layout



UL 98 Non-Fused Rotary Disconnect Switches—600, 800, 1000 and 1200A

For a Complete Assembly, Please Select:

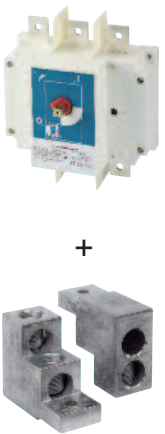Select for Standard Applications		Switch								
		Switch Amp Rating	No. of Poles	SCCR	Max Horsepower Rating				Part Number	
					3-Phase			DC*		
					220/ 240Vac	440/ 480Vac	600 Vac			125 Vdc
		600A	3	200kA	240	400	350	20	50	RD600-3
		600A	4	200kA	240	400	350	20	50	RD600-4
		800A	3	100kA	200	500	500	-	-	RD800-3
		800A	4	100kA	200	500	500	-	-	RD800-4
		1000A	3	100kA	200	500	500	-	-	RD1000-3
		1000A	4	100kA	200	500	500	-	-	RD1000-4
		1200A	3	100kA	200	500	500	-	-	RD1200-3
		1200A	4	100kA	200	500	500	-	-	RD1200-4
		* DC Ratings use two poles in series.								
		Terminal Lug Kit								
		Switch Amp Rating	No. of Poles	Lugs Per Kit	Lugs Required per Pole	Wire Range	Wire Type	Part Number		
600	3	3	1	(2) #2-600MCM	75°C Cu/Al	LUG5-3				
600	4	4	1	(2) #2-600MCM	75°C Cu/Al	LUG5-4				
800-1200	3	6	2	(4) #2-600MCM	75°C Cu/Al	LUG6-6				
800-1200	4	8	2	(4) #2-600MCM	75°C Cu/Al	LUG6-8				
		+								
HANDLE		Direct Mount Handle - mounts directly to switch, no shaft required					Part Number			
		For Switch Part Number	Color	Test Function	Padlockable					
		All Switches	Black	N	Y		DIR-04			
				or						
				External Front Operated Pistol Handles - shaft required					Part Number	
				NEMA Type	Color	Test Function	Padlockable	Defeatable		
				1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-07B ⁽¹⁾	
				1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-07R ⁽¹⁾	
				1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-08B ⁽²⁾	
				1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-08R ⁽²⁾	
Metallic Hasp (Heavy Duty) External Front Operated Pistol Handles - shaft required					Part Number					
NEMA Type	Color			Test Function		Padlockable	Defeatable			
1, 3R, 4, 4X, 12	Black			N	Y	Y	H4X-07BHD ⁽³⁾			
1, 3R, 4, 4X, 12	Red/Yellow			N	Y	Y	H4X-07RHD ⁽³⁾			
1, 3R, 4, 4X, 12	Black	N	Y	Y	H4X-08BHD ⁽⁴⁾					
1, 3R, 4, 4X, 12	Red/Yellow	N	Y	Y	H4X-08RHD ⁽⁴⁾					
		Shafts for Pistol Handles				Part Number				
		Length in (mm)	Mounting Depth (X) in (mm)							
		7.9 (200)	8.70~13.50 (221~343)			SH6-200				
		12.6 (320)	8.70~18.23 (221~463)			SH6-320				
		15.7 (400)	8.70~21.38 (221~543)			SH6-400				
		Shaft Guide				Part Number				
		Required for 15.7" (400mm) long shafts, optional for other lengths								
		and ...								
Accessories		Auxiliary Contacts								
		Contact Type	Number of Contacts	Continuous Amp Rating	Voltage Rating	Max Number of Aux Contacts per Switch	Part Number			
		NO + NC	1 of each	10.1A	125-250Vac	2	BAC03*			
		NO + NC	1 of each	10.1A	125-250Vac	2	BAC04*			
		NO + NC	1 of each	1A	125Vac	2	BAC11*			
NO + NC	1 of each	1A	125Vac	2	BAC12*					
		* For one auxiliary contact, install either BAC03 or BAC11. For two auxiliary contacts, install BAC03 + BAC04, or BAC11 + BAC12.								

UL 98 Non-Fused Rotary Disconnect Switches—600, 800, 1000 and 1200A

Accessories

SHROUDS




and ...


Terminal Shrouds* - includes terminal shroud for lineside or loadside			
Switch Amp Rating	Number of Poles	Location on Switch	Part Number
600A	3	Lineside or Loadside	TSH6-3TB
600A	4	Lineside or Loadside	TSH6-4TB
800-1200A	3	Lineside or Loadside	TSH7-3TB
800-1200A	4	Lineside or Loadside	TSH7-4TB

* Shroud for lineside included with switch.

Dimensions - in (mm) 600A

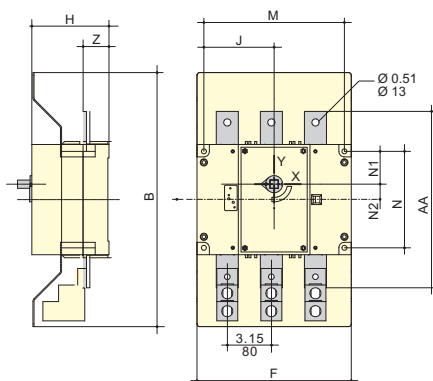



800 to 1200A

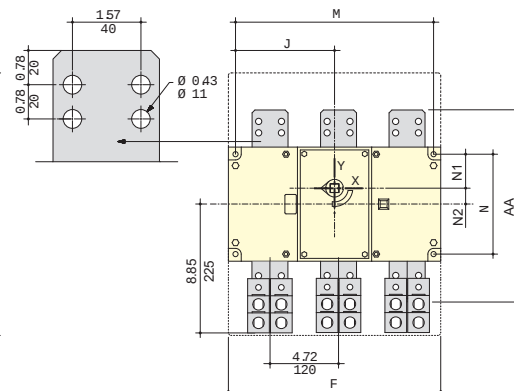


Switch Rating (A)	Terminal Shrouds B	Switch Body					Switch Mounting					Connection	
		F 3p.	F 4p.	H	J 3p.	J 4p.	M 3p.	M 4p.	N	N1	N2	AA	Z
600	18.12 (460)	11 (280)	14.17 (360)	5.5 (140)	5 (127.5)	6.59 (167.5)	10.03 (255)	13.19 (335)	6.88 (175)	2.34 (59.5)	1.10 (28)	12.6 (320)	1.85 (47)
800	18.12 (460)	14.64 (372)	19.37 (492)	5.5 (140)	6.83 (173.5)	9.19 (233.5)	13.66 (347)	18.38 (467)	6.88 (175)	2.34 (59.5)	1.10 (28)	13 (330)	1.85 (47)
1000	18.12 (460)	14.64 (372)	19.37 (492)	5.5 (140)	6.83 (173.5)	9.19 (233.5)	13.66 (347)	18.38 (467)	6.88 (175)	2.34 (59.5)	1.10 (28)	13 (330)	1.85 (47)
1200	18.12 (460)	14.64 (372)	19.37 (492)	5.5 (140)	6.83 (173.5)	9.19 (233.5)	13.66 (347)	18.38 (467)	6.88 (175)	2.34 (59.5)	1.10 (28)	13 (330)	1.85 (47)

External Front Pistol Handles


Handle Type Direction of Front Operation

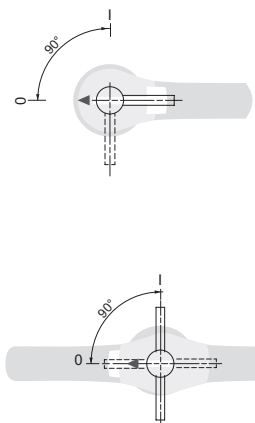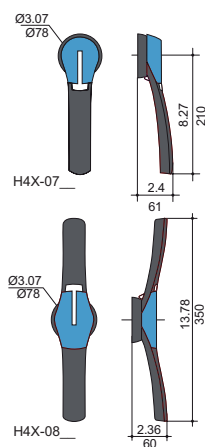


Door Drilling Layout



Direct Mount Handle



Terminal Lugs

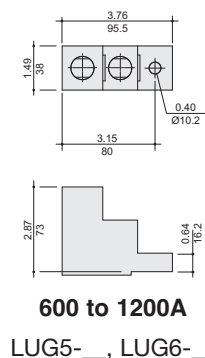

UL 508 Non-Fused Rotary Disconnect Switches—16 to 80A

Description

Cooper Bussmann UL 508 load break disconnect switches allow safe control and safe disconnection of any motor application or to isolate a circuit within the panel.

These disconnect switches are compact and offer a wide variety of accessories like 4th poles, auxiliary contacts, door mounting and 6/8-Pole kits.

Features

- Suitable as motor disconnect
- DIN-Rail or panel mount
- Door mount option
- Disconnect switches are front, right side or direct handle operable
- Finger-safe

Agency Information

- UL508, Guide NLRV, File E155129
- CSA C22.2 No. 14, File 257020
- Conforms with IEC 60947-3

Online Resources

Visit www.cooperbussmann.com/Disconnects for:

- CAD Drawings
- Instruction Sheets
- UL Information



QuikShip
Everyday

QuikShip Everyday Service ships the most common part numbers within 24 hours. Contact your Bussmann representative for details.

Related Cooper Bussmann Products

Product	Data Sheet #
---------	--------------

Fuses Blocks

Modular Knifeblade Fuse Blocks 100-600A	3192
---	------

Fuses Holders

CH Series Class CC, Midget & 10x38 0-30A	3185
Finger-Safe Optima Series 0-30A	1102
Optima™ Protection Modules 0-30A	1109
CH Series Class J 0-60A	2144

IEC Electrical Specifications



RD16-3-508



RD16-3-508 with 6-Pole Conversion Kit

Part Number	RD16-3-508	RD25-3-508	RD40-3-508	RD63-3-508	RD80-3-508
Thermal Current I_{th} at 40°C (A)	16	25	40	63	80
Rated insulation voltage U_i (V)	800	800	800	800	800
Rated impulse withstand voltage U_{imp} (kV)	8	8	8	8	8
Rated Operation Currents I_n (A)					
Load Duty Category	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾
Rated Voltage					
500Vac	AC-22 A/AC-22 B	25/25	40/40	63/63	80/80
500Vac	AC-23 A/AC-23 B	25/25	25/25	63/63	63/63
690Vac	AC-21 A/AC-21 B	25/25	40/40	63/63	80/80
690Vac	AC-22 A/AC-22 B	25/25	32/40	40/63	63/80
690Vac	AC-23 A/AC-23 B	25/25	25/25	40/40	40/40
Operational Power in AC-23 (kW)					
400Vac without prebreak AC ⁽¹⁾⁽²⁾	7.5	11	18.5	30	37
500Vac without prebreak AC ⁽¹⁾⁽²⁾	7.5	11	15	30	37
690Vac without prebreak AC ⁽¹⁾⁽²⁾	7.5	15	18.5	30	37
Overload Capacity (U_e 415 Vac)					
Rated short-time withstand current 0.3 s. I_{cw} (kA rms) ⁽³⁾	2.5	2.5	2.5	3	3
Rated short-time making capacity I_{cm} (kA peak) ⁽³⁾	6	6	6	9	9
Fuse Protected Short-Circuit Withstand (kA rms Prospective)					
Prospective short-circuit current (kA rms) ⁽³⁾	50	50	50	50	50
Associated fuse rating (A) ⁽³⁾	16	25	40	63	80
Connection					
Minimum Cu cable cross section (mm ²)	1.5	1.5	1.5	2.5	2.5
Maximum Cu cable section (mm ²)	16	16	16	35	35
Tightening torque min/max (N·m)	2/2.2	2/2.2	2/2.2	3.5/3.85	3.5/3.85

(1) A/B: Category with index A = frequent operation; category with index B = infrequent operation.

(2) The power value is given for information only; the current values vary from one manufacturer to another.

(3) For a rated operating voltage, U_e = 400Vac.

UL 508 Non-Fused Rotary Disconnect Switches— 16 to 80A

UL Electrical Specifications



RD16-3-508






RD16-3-508 with 6-Pole Conversion Kit

Part Number	RD16-3-508	RD25-3-508	RD40-3-508	RD63-3-508	RD80-3-508
UL Standard	UL 508	UL 508	UL 508	UL 508	UL 508
Max Ampacity	16A	25A	40A	63A	80A
Handle Operation	Front/Side	Front/Side	Front/Side	Front/Side	Front/Side
UL Electrical Ratings					
Max Voltage (AC)	600Vac	600Vac	600Vac	600Vac	600Vac
Maximum Horsepower Ratings					
3-Phase, 208Vac	3	7.5	7.5	15	15
3-Phase, 240Vac	5	7.5	7.5	20	20
3-Phase, 480Vac	10	15	20	40	40
3-Phase, 600Vac	10	20	25	40	40
Electrical Characteristics					
SCCR with Fuse	65kA	65kA	10/65kA	50/65kA	50/65kA
Recommended Upstream					
Fuse Class	J	J	J	J	J
Max. Fuse Rating	30A	30A	60/30A	100/60A	100/60A
Terminals	Integral	Integral	Integral	Integral	Integral
Wire Type	75°C Cu	75°C Cu	75°C Cu	75°C Cu	75°C Cu
Wire Range & Torque - Lb-IN (N·m)					
Solid					
Single	#14-10 26.5 (3)	#14-10 26.5 (3)	#14-10 26.5 (3)	#14-10 31.1 (3.5)	#14-10 31.1 (3.5)
Dual	#12 26.5 (3)	#12 26.5 (3)	#12 26.5 (3)	#12 31.1 (3.5)	#12 31.1 (3.5)
Stranded					
Single	#14-4 26.5 (3)	#14-4 26.5 (3)	#14-4 26.5 (3)	#14-1 31.1 (3.5)	#14-1 31.1 (3.5)
Dual	#14-12 26.5 (3)	#14-12 26.5 (3)	#14-12 26.5 (3)	#10-6 31.1 (3.5)	#10-6 31.1 (3.5)
Mechanical Characteristics					
Endurances/Cycles	10,000	10,000	10,000	10,000	10,000
Physical Characteristics					
Dimensions - See drawings on product pages					
Weight - Lb (KG)	0.5 (0.2)	0.5 (0.2)	0.5 (0.2)	0.7 (0.32)	0.7 (0.32)
Environmental					
Operating Temperature	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C
Flammability Rating	UL 94-V0	UL 94-V0	UL 94-V0	UL 94-V0	UL 94-V0
Accessories					
Handles					
Direct	DIR-01	DIR-01	DIR-01	DIR-01	DIR-01
Short Selector/NEMA 1, 3R, 4, 4X, 12	H4X-01B H4X-01R	H4X-01B H4X-01R	H4X-01B H4X-01R	H4X-01B H4X-01R	H4X-01B H4X-01R
Long Selector/NEMA 1, 3R, 4, 4X, 12	H4X-02B H4X-02R	H4X-02B H4X-02R	H4X-02B H4X-02R	H4X-02B H4X-02R	H4X-02B H4X-02R
Shafts - 5x5mm					
5.9"/150mm	SH4-150	SH4-150	SH4-150	SH4-150	SH4-150
7.9"/200mm	SH4-200	SH4-200	SH4-200	SH4-200	SH4-200
12.6"/320mm	SH4-320	SH4-320	SH4-320	SH4-320	SH4-320
Shaft Guide	SH-GUIDE1	SH-GUIDE1	SH-GUIDE1	SH-GUIDE1	SH-GUIDE1
Door Mount Kit	DOOR-508	DOOR-508	DOOR-508	DOOR-508	DOOR-508
Shrouds/Switch Amps					
1-Pole	TSH1-1TB	TSH1-1TB	TSH1-1TB		
3-Pole (Loadside and Lineside)	TSH1-3TB	TSH1-3TB	TSH1-3TB	TSH2-3TB	TSH2-3TB
Switched 4 th Pole/Switch Amps	POLE-16	POLE-25	POLE-40	—	—
Auxiliary Contacts					
NO + NC (1 ea.)	BAC01	BAC01	BAC01	BAC01	BAC01
(2) NO	BAC02	BAC02		BAC02	BAC02
AC Ratings					
Volts	240Vac	240Vac	240Vac	240Vac	240Vac
Amps	10A	10A	10A	10A	10A
6-/8-Pole Conversion Kit					
Gangs two switches of same rating, 16-80A switch amps	KIT-6POLE	KIT-6POLE	KIT-6POLE	KIT-6POLE	KIT-6POLE
— Not available.					

UL 508 Non-Fused Rotary Disconnect Switches—16, 25, 40, 63 and 80A

For a Complete Assembly, Please Select:

Switch	Switch								Wire Size	Wire Type	Part Number
	Amp Rating	No. of Poles	SCCR @600V	Max Class J Fuse	Max Horsepower Rating, 3-Ph						
					208 Vac	220/240Vac	440/480Vac	600 Vac			
	16	3	65kA	30A	3	5	10	10	#14-#10 Sol Dual #12 Sol #14-#4 Str Dual #14-#12 Str	75°C Cu	RD16-3-508
	25	3	65kA	30A	7.5	7.5	15	20	#14-#10 Sol Dual #12 Sol #14-#4 Str Dual #14-#12 Str	75°C Cu	RD25-3-508
	40	3	10kA 65kA	60A 30A	7.5	7.5	20	25	#14-#10 Sol Dual #12 Sol #14-#4 Str Dual #14-#12 Str	75°C Cu	RD40-3-508
	63	3	50kA 65kA	100A 60A	15	20	40	40	#14-#10 Sol Dual #12 Sol #14-#1 Str Dual #10-#6 Str	75°C Cu	RD63-3-508
	80	3	50kA 65kA	100A 60A	15	20	40	40	#14-#10 Sol Dual #12 Sol #14-#1 Str Dual #10-#6 Str	75°C Cu	RD80-3-508
+											
	Direct Mount Handle - mounts directly to switch, no shaft required										Part Number
	For Switch Part Number	Color		Test Function	Padlockable						
All Switches		Black		N	Y - On Switch						DIR-01
OR											
   	External Front or Right Side Operated Selector Handles - shaft required										
	NEMA Type	Color	Handle Length	Test Function	Padlockable	Defeatable	Part Number				
	1, 3R, 4, 4X, 12	Black	Short	N	Y	Y	H4X-01B ⁽¹⁾				
	1, 3R, 4, 4X, 12	Red/Yellow	Short	N	Y	Y	H4X-01R ⁽¹⁾				
	1, 3R, 4, 4X, 12	Black	Long	N	Y	Y	H4X-02B ⁽²⁾				
	1, 3R, 4, 4X, 12	Red/Yellow	Long	N	Y	Y	H4X-02R ⁽²⁾				
	Shafts for Selector Handles - required for 12.6" (320mm) shafts										
	Length in (mm)	Mounting Depth (X) in (mm)								Part Number	
	5.9 (150)	3.50-7.60 (89-193)								SH4-150	
	7.9 (200)	3.50-9.50 (89-241)								SH4-200	
12.6 (320)	3.50-14.9 (89-378)								SH4-320		
Shaft Guide											Part Number
Required for 12.6" (320mm) long shafts, optional for other lengths.											SH-GUIDE1
Door Mount Kit - for mounting switch on the right side of the enclosure or directly on the enclosure door using switch side operation shaft location. Kit includes a shaft. <i>Order switch and selector handle separately.</i>											Part Number
Switch Rating											Part Number
All Switches - kit includes shaft											DOOR-508
and ...											
	Auxiliary Contacts										
	Contact Type	Number of Contacts	Continuous Amp Rating	Voltage Rating	Max Number of Aux Contacts per Switch			Part Number			
	NO + NC	1 Ea	10A	240Vac	4			BAC01			
	NO	2	10A	240Vac	4			BAC02			



Auxiliary Contact Configurations

UL 508 Non-Fused Rotary Disconnect Switches—16, 25, 40, 63 and 80A

Accessories

SHROUDS



Terminal Shrouds - includes terminal shroud for both lineside <i>and</i> loadside			
Switch Amp Rating	Number of Poles	Location on Switch	Part Number
16-40A	1 (for switched 4 th pole)	Lineside and Loadside	TSH1-1TB
16-40A	3	Lineside and Loadside	TSH1-3TB
63-80A	3	Lineside and Loadside	TSH2-3TB

and ...

SW. 4TH POLE



Switched 4 th Pole - converts 3-pole switch to 4-pole switch		
Switch Amp Rating		Part Number
16		POLE-16
25		POLE-25
40		POLE-40

and ...

6-POLE KIT



6-Pole Conversion Kit - creates a 6-pole switch by ganging two 3-pole switches of equal rating		
Switch Amp Rating		Part Number
All Switches		KIT-6POLE*

* Kit ships with a direct handle. If external handle is needed order a selector handle *and* shaft for the UL 508 Rotary Disconnect Switches.
Note: To create an 8-pole switch from 16 to 40 amp switches, use two 3-pole switches of equal ratings plus two switched 4th poles (part # POLE-).

Order switches separately.


Order switches separately.



Switched 4th Pole Configurations.


Dimensions – in (mm)

Direct Handle Operation

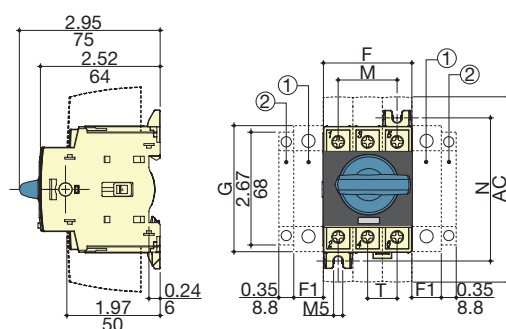


1. Position for 1 switched 4th pole (1 per device max.) or 1 auxiliary contact.
 2. Position for 1 auxiliary contact only.
- Note: Maximum of 4 auxiliary contacts, or 3 auxiliary contacts + one switched 4th pole.

External Front Operation

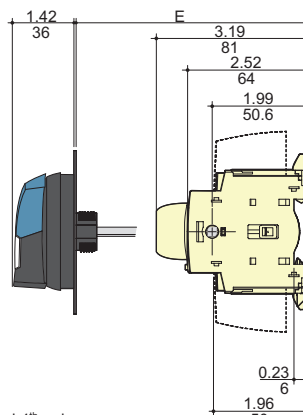

External Side Operation

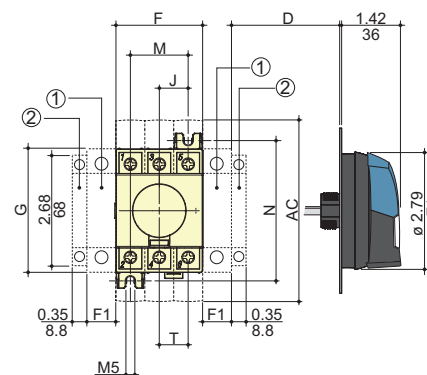


Switch Rating (A)	Overall Dimensions				Terminal Shroud AC	Switch Body				Switch Mounting		Connection T
	D min	D max	E min	E max		F	F1	G	J	M	N	
16 to 40	1.18 (30)	9.25 (235)	3.94 (100)	14.64 (372)	4.33 (110)	1.77 (45)	0.59 (15)	2.67 (68)	0.59 (15)	1.18 (30)	2.95 (75)	0.59 (15)
63 to 80	1.18 (30)	9.25 (235)	3.93 (100)	14.64 (372)	4.33 (110)	2.06 (52.5)	0.69 (17.5)	2.99 (76)	0.69 (17.5)	1.38 (35)	3.35 (85)	0.69 (17.5)


UL 508 Non-Fused Rotary Disconnect Switches—16, 25, 40, 63 and 80A

Dimensions – in (mm)

Direct Front Operation for 6/8-Pole Disconnects

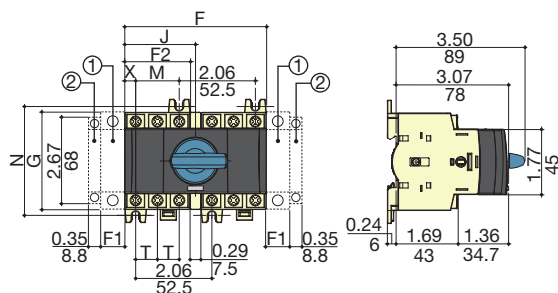

External Front Operation for 6/8-Pole Disconnects

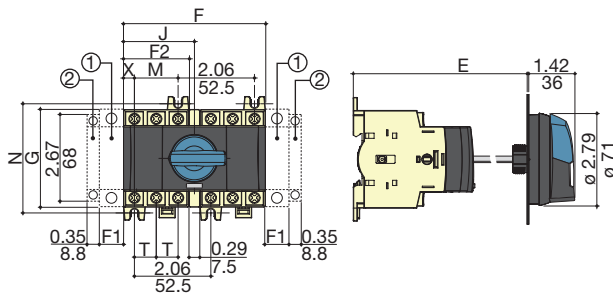


1. Position for 1 switched 4th pole (1 per device max.) or 1 auxiliary contact.
 2. Position for 1 auxiliary contact only.
 Note: Maximum of 4 auxiliary contacts, or 3 auxiliary contacts + one switched 4th pole.


Switch Rating (A)	Overall Dimensions			Switch Body				Switch Mounting		Connection	
	E min	E max	F	F1	F2	G	J	M	N	T	X
16 to 40	4.13 (105)	14.64 (372)	3.83 (97.5)	0.59 (15)	1.77 (45)	2.67 (68)	1.92 (48.75)	1.18 (30)	2.95 (75)	0.59 (15)	0.29 (7.5)
63 to 80	4.13 (105)	14.65 (372)	4.13 (105)	0.69 (17.5)	2.06 (52.5)	2.99 (76)	2.06 (52.5)	1.38 (3.5)	3.35 (85)	0.69 (17.5)	0.34 (8.75)

External Selector Handles


Handle Type

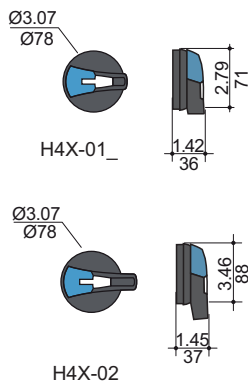


Direction of Front Operation



Direction of Right Side Operation



Door Drilling Layouts

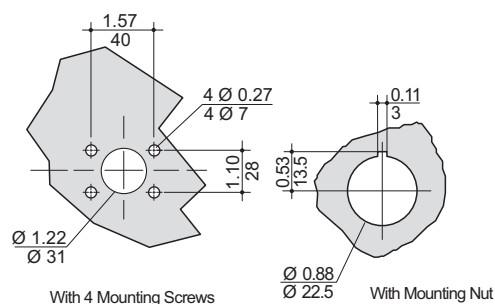

UL 98 & UL 508 Enclosed Disconnect Switches

Description

Fused and non-fused enclosed Rotary Disconnect Switches from 16 to 1200A in NEMA 1, 3R, 4, 4X, 12 enclosures.

Features

- UL 98 Listed for general purpose, main disconnect, or branch circuit protection up to 600Vac/dc
- UL 508 Listed for motor disconnect applications up to 600Vac
- Multiple field installed accessories enhance the enclosed disconnect switches to fit the desired application
- Lockout/tagout: Up to three 1/4" shank padlocks can be installed on external handles

Ratings:

- Volts: 600Vac
250-600Vdc*
- Amps: 16-1200A
- Short-Circuit Current Ratings: UL 98: 25kA-200kA
UL 508: 10kA-65kA

*Some non-fused disconnect switches are not rated for DC applications.

Specifications

- Operating temperature: -20°C to 70°C
- 4X Plastic Enclosure Flammability Rating:
Polycarbonate UL 94-5VA-0
Fiberglass UL 94-5V

Agency Information

- UL 98 Listed: File E182262, Guide WIAAX, WIAAX7
- UL 508 Listed: File E155129, Guide NLRV, NLRV7
- cULus Listed to CSA Standard 22.2, No. 14
- cULus Listed to CSA Standard 22.2, No. 4
- Conforms with IEC 60947-3
- CE Compliant
- RoHS Compliant

Field Installed Accessories

- Auxiliary contacts
- Terminal shrouds

Online Resources

Visit www.cooperbussmann.com/Disconnects for:

- CAD Drawings
- Instruction Sheets
- UL Information



NEMA 1, 3R, 4 & 12



NEMA 4X
Stainless Steel



NEMA 4X
Polycarbonate
or Fiberglass

QuikShip

Everyday

QuikShip Everyday Service ships the most common part numbers within 24 hours. Contact your Cooper Bussmann representative for details.

Available Cooper Bussmann Fuses

Class	Type	Data Sheet #
CC	LP-CC Time-Delay, Current Limiting	1023
CC	FNQ-R Time-Delay	1014
CC	KTK-R Fast-Acting	1015
J	LPJ Time-Delay, Current Limiting	1006 (0-60A)
J		1007 (70-600A)
J	With easyID™ open fuse indication	1062 (6-60A)
J		1063 (70-600A)
J	JKS Fast-Acting Fuses	1026 (0-60A)
J		1027 (70-600A)
J	DFJ High Speed Drive Fuse	1048 (0-600A)
L	KRP-C Time-Delay, Current Limiting	1008
L	KTU Fast-Acting	1010
L	KLU Time-Delay	1013

UL 98 Enclosed Fused Disconnects—30 to 800A

3-Pole UL 98 600Vac

Part Number System: **ER** **4X** - **60** **J** **3** **P** **B**

ER — Enclosed Rotary Disconnect

NEMA Rating — 1, 3R, 4, 4X (SST), 4P (4X Plastic), 12

Amp Rating — 30, 60, 100, 200, 400, 600, 800

Fuse Class — J = Class J, L = Class L

Number of Poles — 3 = 3-Pole

Handle Type — P = Pistol

Handle Color — B = Black, R = Red

30-800A



NEMA 1, 3R, 4 & 12



NEMA 4X Plastic



NEMA 4X Stainless

Part Numbers - All part numbers provided with integral or installed lugs and a black selector handle.
Order red/yellow handle by changing the suffix "B" to "R."

UL General Purpose Amp Rating	Fuse Type	NEMA Enclosure Type & Part Number					
		1	3R	4	4X Plastic ⁽¹⁾	4X Stainless	12
30	J	ER1-30J3PB	ER3R-30J3PB	ER4-30J3PB	ER4P-30J3PB	ER4X-30J3PB	ER12-30J3PB
60	J	ER1-60J3PB	ER3R-60J3PB	ER4-60J3PB	ER4P-60J3PB	ER4X-60J3PB	ER12-60J3PB
100	J	ER1-100J3PB	ER3R-100J3PB	ER4-100J3PB	ER4P-100J3PB	ER4X-100J3PB	ER12-100J3PB
200	J	ER1-200J3PB	ER3R-200J3PB	ER4-200J3PB	ER4P-200J3PB	ER4X-200J3PB	ER12-200J3PB
400	J	ER1-400J3PB	ER3R-400J3PB	ER4-400J3PB	ER4P-400J3PB	ER4X-400J3PB	ER12-400J3PB
600	J	ER1-600J3PB	ER3R-600J3PB	ER4-600J3PB	ER4P-600J3PB	ER4X-600J3PB	ER12-600J3PB
800	L	ER1-800L3PB	ER3R-800L3PB	ER4-800L3PB	ER4P-800L3PB	ER4X-800L3PB	ER12-800L3PB


(1) Enclosures ≤100A are polycarbonate, flammability rating UL 94-5VA-V0, ≥200A are fiberglass, flammability rating UL 94-5V.

Switch Ratings - for wire types, ranges and tightening torques, see table on page 9

Switch Amp Rating	Disconnect Switch	Fuse Type	No. of Poles	Voltage		SCCR @ Vac	Max Hp Rating @ 600Vac
				Vac	Vdc		
30	RDF30J-3	J	3	600	250	200kA	20
60	RDF60J-3	J					50
100	RDF100J-3	J					75
200	RDF200J-3	J					150
400	RDF400J-3	J					350
600	RDF600J-3	J					500
800	RDF800L-3	L			600		

UL 98 Enclosed Fused Disconnects—30 to 800A

Enclosure Weights - Lbs & Dimensions - in

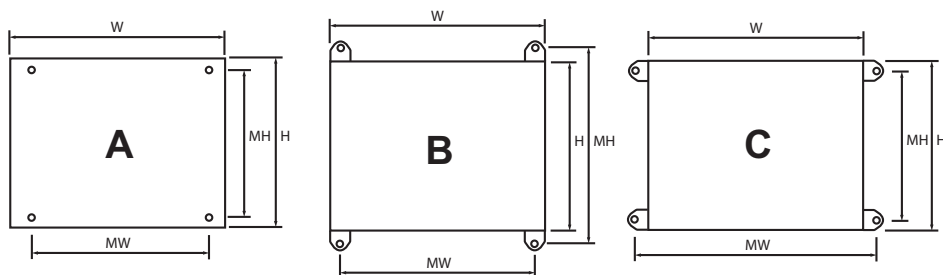

Part Number Family	Amp Rating	Fuse Type	NEMA Enclosure Type	H x W x D	Mounting Centers H x W			Weight Lbs
					A	B	C	
ER_-30J	30	J	1, 3R, 4, 12	10x10x6	8.3x8.3			15
			4X-SST	10x10x6		9.5x8.3	8.3x9.5	15
			4X-Plastic ⁽¹⁾	12x10x6		12x5.6	7.64x10	8
ER_-60J	60	J	1, 3R, 4, 12	12x10x6	10.3x8.3			19
			4X-SST	12x10x6		11.5x8.3	10.3x9.5	19
			4X-Plastic ⁽¹⁾	13x13x6		14x7.6	9.6x12	11
ER_-100J	100	J	1, 3R, 4, 12	14x12x6	12.3x10.3			21
			4X-SST	14x12x6		13.5x10.3	12.3x11.5	21
			4X-Plastic ⁽¹⁾	13x13x6		14x7.6	9.6x12	12
ER_-200J	200	J	1, 3R, 4, 12	24x20x8	22x18.1			55
			4X-SST	24x20x8		23.2x18.1	22x19.3	55
			4X-Plastic ⁽¹⁾	27x21x10		25.75x14		39
ER_-400J	400	J	1, 3R, 4, 12	48x36x12	45.75x34.9			188
			4X-SST	48x36x12		46.9x34.9	45.75x36.1	188
			4X-Plastic ⁽¹⁾	51x37x14		50.1x28.5		186
ER_-600J	600	J	1, 3R, 4, 12	48x36x12	45.75x34.9			216
			4X-SST	48x36x12		46.9x34.9	45.75x36.1	216
			4X-Plastic ⁽¹⁾	51x37x14		50.1x28.5		214
ER_-800L	800	L	1, 3R, 4, 12	48x36x12	45.75x34.9			216
			4X-SST	48x36x12		46.9x34.9	45.75x36.1	216
			4X-Plastic ⁽¹⁾	51x37x14		50.1x28.5		214

(1) Enclosures ≤100A are polycarbonate, flammability rating UL 94-5VA-V0, ≥200A are fiberglass, flammability rating UL 94-5V.

Available Field-Installed Accessories - Order Separately

	Auxiliary Contacts - for 30 to 800 Amp Switches					
	Contact Type	Number of Contacts	Continuous Amp Rating	Voltage Rating	Max Number of Aux Contacts per Switch	Part Number
	NO	1	10A	600Vac	30 to 200A: 4	BAC05
	NC	1	10A	600Vac	400 to 800A: 8	BAC06

	Terminal Shrouds - for 200 to 800 Amp Switches - includes terminal shroud for lineside or loadside				
	Switch Amp Rating	Number of Poles			Part Number
	200	3			TSH8-3TB
	400	3			TSH9-3TB
	600-800	3			TSH10-3TB

UL 98 Enclosed Non-Fused Disconnects—30 to 1200A

3-Pole UL 98 600Vac

Part Number System: **ER** **4X** - **60** **N** **3** **S** **B**

ER — Enclosed Rotary Disconnect

NEMA Rating — 1, 3R, 4, 4X (SST), 4P (4X Plastic), 12

Amp Rating — 30, 60, 100, 200, 400, 600, 800, 1200

N = Non-Fused

Number of Poles — 3 = 3-Pole

Handle Type* — P = Pistol, S = Selector

Handle Color — B = Black, R = Red

* ≤100A = Selector only, ≥200A = Pistol only.

30-100A



NEMA 1, 3R, 4 & 12



NEMA 4X



NEMA 4X Stainless

200-1200A



NEMA 1, 3R, 4 & 12



NEMA 4X



NEMA 4X Stainless

Part Numbers - All part numbers provided with integral or installed lugs and a black selector handle.
Order red/yellow handle by changing the suffix "B" to "R."

UL General Purpose Amp Rating	NEMA Enclosure Type & Part Number					
	1	3R	4	4X Plastic ⁽¹⁾	4X Stainless	12
30	ER1-30N3SB	ER3R-30N3SB	ER4-30N3SB	ER4P-30N3SB	ER4X-30N3SB	ER12-30N3SB
60	ER1-60N3SB	ER3R-60N3SB	ER4-60N3SB	ER4P-60N3SB	ER4X-60N3SB	ER12-60N3SB
100	ER1-100N3SB	ER3R-100N3SB	ER4-100N3SB	ER4P-100N3SB	ER4X-100N3SB	ER12-100N3SB
200	ER1-200N3PB	ER3R-200N3PB	ER4-200N3PB	ER4P-200N3PB	ER4X-200N3PB	ER12-200N3PB
400	ER1-400N3PB	ER3R-400N3PB	ER4-400N3PB	ER4P-400N3PB	ER4X-400N3PB	ER12-400N3PB
600	ER1-600N3PB	ER3R-600N3PB	ER4-600N3PB	ER4P-600N3PB	ER4X-600N3PB	ER12-600N3PB
800	ER1-800N3PB	ER3R-800N3PB	ER4-800N3PB	ER4P-800N3PB	ER4X-800N3PB	ER12-800N3PB
1200	ER1-1200N3PB	ER3R-1200N3PB	ER4-1200N3PB	N/A	ER4X-1200N3PB	ER12-1200N3PB

(1) Enclosures ≤100A are polycarbonate, flammability rating UL 94-5VA-V0, ≥200A are fiberglass, flammability rating UL 94-5V.


Switch Ratings - for wire types, ranges and tightening torques, see table on page 27

Switch Amp Rating	Disconnect Switch	No. of Poles	Voltage		SCCR @ Vac	Max Hp Rating @ 600Vac
			Vac	Vdc		
30	RD30-3	3	600	N/A	100kA	25
60	RD60-3				25kA/100kA*	50
100	RD100-3					200
200	RD200-3			250	200kA	350
400	RD400-3				N/A	100kA
600	RD600-3					
800	RD800-3					
1200	RD1200-3					

* 25kA @ 600Vac, 100kA @ 480Vac.

UL 98 Enclosed Non-Fused Disconnects—30 to 1200A

Enclosure Weights - Lbs & Dimensions - in

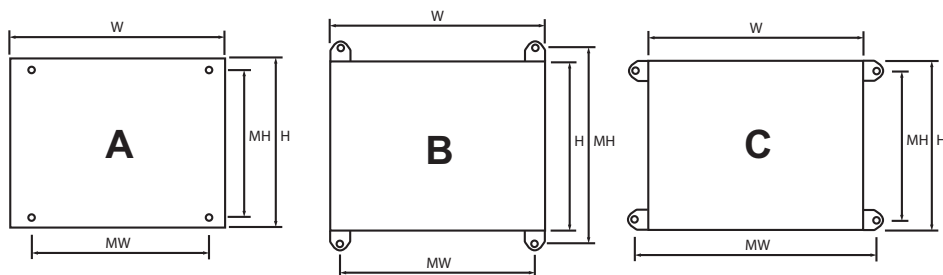

Part Number Family	Amp Rating	NEMA Enclosure Type	H x W x D	Mounting Centers H x W			Weight Lbs
				A	B	C	
ER_-30	30	1, 3R, 4, 12	10x8x6	8.3x6.3			11
		4X-SST	10x8x6		9.5x6.3	8.3x7.5	11
		4X-Plastic ⁽¹⁾	9x9x6		10x3.6	5.6x8	5
ER_-60	60	1, 3R, 4, 12	10x8x6	8.3x6.3			12
		4X-SST	10x8x6		9.5x6.3	8.3x7.5	12
		4X-Plastic ⁽¹⁾	9x9x6		10x3.6	5.6x8	5
ER_-100	100	1, 3R, 4, 12	12x10x6	10.3x8.3			12
		4X-SST	12x10x6		11.5x8.3	0.3x9.5	12
		4X-Plastic ⁽¹⁾	13x13x6		14x7.6	9.6x12	8
ER_-200	200	1, 3R, 4, 12	20x16x8	18.1x14.2			39
		4X-SST	20x16x8		19.3x14.2	18.1x15.4	39
		4X-Plastic ⁽¹⁾	23x17x12		21.5x10.1		31
ER_-400	400	1, 3R, 4, 12	36x30x8	33.9x28.3			122
		4X-SST	36x30x8		35.1x28.3	33.9x29.5	122
		4X-Plastic ⁽¹⁾	40x32x14		38.1x23.9		103
ER_-600	600	1, 3R, 4, 12	48x36x12	45.8x34.9			209
		4X-SST	48x36x12		47x34.9	45.8x36.1	209
		4X-Plastic ⁽¹⁾	51x37x 14		50.1x28.5		187
ER_-800	800	1, 3R, 4, 12	48x36x12	45.8x34.9			211
		4X-SST	48x36x12		47x34.9	45.8x36.1	211
		4X-Plastic ⁽¹⁾	51x37x 14		50.1x28.5		189
ER_-1200	1200	1, 3R, 4, 12	60x36x16	57.5x33.9			268
		4X-SST	60x36x16		58.7x33.9	57.5x35.1	268

(1) Enclosures ≤100A are polycarbonate, flammability rating UL 94-5VA-V0, ≥200A are fiberglass, flammability rating UL 94-5V.

Available Field-Installed Accessories - Order Separately

	Auxiliary Contacts - for 30 to 1200 Amp Switches						
	Switch Amp Rating	Contact Type	Number of Contacts	Continuous Amp Rating	Voltage Rating	Max Number of Aux Contacts per Switch	Part Number
	30-100	NO + NC	1 of each	10A	240Vac	4	BAC01
	30-100	NC	2	10A	240Vac	4	BAC02
	100-1200	NO + NC	1 of each	10.1A	125-250Vac	2	BAC03*
	100-1200	NO + NC	1 of each	10.1A	125-250Vac	2	BAC04*
	100-1200	NO + NC	1 of each	1A	125Vac	2	BAC11*
	100-1200	NO + NC	1 of each	1A	125Vac	2	BAC12*
	* For one auxiliary contact, install either BAC03 or BAC11. For two auxiliary contacts, install BAC03 + BAC04, or BAC11 + BAC12.						

	Terminal Shrouds - for 200 to 800 Amp Switches			
	Switch Amp Rating	Number of Poles	Location on Switch	Part Number
	30-100	3	Lineside and Loadside	TSH3-3TB
	200A	3	Lineside	TSH4-3T
	200A	3	Loadside	TSH4-3B
	400A	3	Lineside	TSH5-3T
	400A	3	Loadside	TSH5-3B
	600A	3	Lineside or Loadside	TSH6-3TB
	800-1200A	3	Lineside or Loadside	TSH7-3TB

UL 508 Enclosed Non-Fused Disconnects—16 to 80A

3-/6-Pole UL 508 600Vac

Part Number System: **ER** **4X** - **63** **N** **6** **S** **B**

ER — Enclosed Rotary Disconnect

NEMA Rating — 1, 3R, 4, 4X (SST), 4P (4X Plastic), 12

Amp Rating — 16, 25, 40, 63, 80

N = Non-Fused

Number of Poles — 3 = 3-Pole, 6 = 6-Pole

Handle Type — S = Selector

Handle Color — B = Black, R = Red

16-80A



NEMA 1, 3R, 4 & 12



NEMA 4X Plastic



NEMA 4X Stainless

Part Numbers - All part numbers provided with a black selector handle. Order red/yellow handle by changing the suffix "B" to "R."

UL General Purpose Amp Rating	No. of Poles	NEMA Enclosure Type & Part Number					
		1	3R	4	4X Plastic ⁽¹⁾	4X Stainless	12
16	3	ER1-16N3SB	ER3R-16N3SB	ER4-16N3SB	ER4P-16N3SB	ER4X-16N3SB	ER12-16N3SB
	6	ER1-16N6SB	ER3R-16N6SB	ER4-16N6SB	ER4P-16N6SB	ER4X-16N6SB	ER12-16N6SB
25	3	ER1-25N3SB	ER3R-25N3SB	ER4-25N3SB	ER4P-25N3SB	ER4X-25N3SB	ER12-25N3SB
	6	ER1-25N6SB	ER3R-25N6SB	ER4-25N6SB	ER4P-25N6SB	ER4X-25N6SB	ER12-25N6SB
40	3	ER1-40N3SB	ER3R-40N3SB	ER4-40N3SB	ER4P-40N3SB	ER4X-40N3SB	ER12-40N3SB
	6	ER1-40N6SB	ER3R-40N6SB	ER4-40N6SB	ER4P-40N6SB	ER4X-40N6SB	ER12-40N6SB
63	3	ER1-63N3SB	ER3R-63N3SB	ER4-63N3SB	ER4P-63N3SB	ER4X-63N3SB	ER12-63N3SB
	6	ER1-63N6SB	ER3R-63N6SB	ER4-63N6SB	ER4P-63N6SB	ER4X-63N6SB	ER12-63N6SB
80	3	ER1-80N3SB	ER3R-80N3SB	ER4-80N3SB	ER4P-80N3SB	ER4X-80N3SB	ER12-80N3SB
	6	ER1-80N6SB	ER3R-80N6SB	ER4-80N6SB	ER4P-80N6SB	ER4X-80N6SB	ER12-80N6SB

(1) Polycarbonate enclosure flammability rating UL 94-5VA-V0.


Switch Ratings - for wire types, ranges and tightening torques, see table on page 35

Switch Amp Rating	Disconnect Switch	Voltage		SCCR with Max Upstream Class J Fuse	Max Hp Rating @ 600Vac
		Vac	Vdc		
16	RD16-3-508	600	N/A	65kA / 30A	10
25	RD25-3-508			65kA / 30A	20
40	RD40-3-508			65kA / 30A — 10kA / 60A	25
63	RD63-3-508			65kA / 60A — 50kA / 100A	40
80	RD80-3-508			65kA / 60A — 50kA / 100A	40

Note: Voltage, SCCR and Horsepower ratings are the same for 3- and 6-pole UL 508 non-fused disconnect switches.

UL 508 Enclosed Non-Fused Disconnects—16 to 80A

Enclosure Weights - Lbs & Dimensions - in

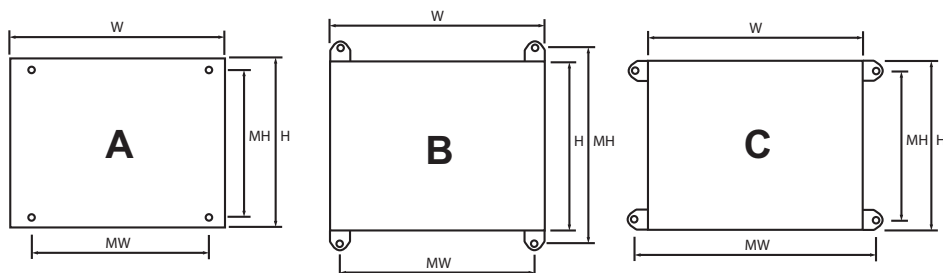


NEMA Enclosure Type	No. of Poles	Switch Amp Ratings	H x W x D	Mounting Centers H x W			Weight Lbs
				A	B	C	
1, 3R, 4, 12	3	16-80A	8x6x6	6.3x4.3			8
	6	16-80A	10x8x6	8.3x6.3			11
4X-SST	3	16-80A	8x6x6		7.5x4.3	6.3x5.5	8
	6	16-80A	10x8x6		9.5x6.3	8.3x7.5	11
4X-Plastic ⁽¹⁾	3	16-63A	7.4x8.7x5.8		8x3.6	3.6x8	4
		80A	9.4x8.7x5.9		10x3.6	5.6x8	5
	6	16-80A	11.4x10.7x6.3		12x5.6	7.64x10	6

(1) Polycarbonate.

Available Field-Installed Accessories - *Order Separately*

	Auxiliary Contacts					
	Contact Type	Number of Contacts	Continuous Amp Rating	Voltage Rating	Max Number of Aux Contacts per Switch	Part Number
	NO + NC	1 Ea	10A	240Vac	4	BAC01
	NO	2	10A	240Vac	4	BAC02



Auxiliary Contact Configurations

	Terminal Shrouds - includes terminal shroud for both lineside <i>and</i> loadside					
	Switch Amp Rating	Number of Poles		Location on Switch		Part Number
	16-40A	3		Lineside and Loadside		TSH1-3TB
	63-80A	3		Lineside and Loadside		TSH2-3TB

Part Number Index

Part Number	Page #	Part Number	Page #	Part Number	Page #
BAC01	28, 35, 36, 43, 45	ER12-400J3PB	40	ER4-1200N3PB	42
BAC02	28, 35, 36, 43, 45	ER12-400N3PB	42	ER4-16N3SB	44
BAC03	30, 32, 43	ER12-40N3SB	44	ER4-16N6SB	44
BAC04	30, 32, 43	ER12-40N6SB	44	ER4-200J3PB	40
BAC05	10, 13, 15, 17, 19, 21, 24, 41	ER1-25N3SB	44	ER4-200N3PB	42
BAC06	10, 13, 15, 17, 19, 21, 24, 41	ER1-25N6SB	44	ER4-25N3SB	44
BAC11	30, 32, 43	ER12-600N3PB	42	ER4-25N6SB	44
BAC12	30, 32, 43	ER12-60J3PB	40	ER4-30J3PB	40
BAC-HOLDER2	10	ER12-60N3SB	42	ER4-30N3SB	42
CCP-1-100CF	6	ER12-63N3SB	44	ER4-400J3PB	40
CCP-1-30CC	4	ER12-63N6SB	44	ER4-400N3PB	42
CCP-1-30CF	6	ER12-800L3PB	40	ER4-40N3SB	44
CCP-1-30DCC	4	ER12-800N3PB	42	ER4-40N6SB	44
CCP-1-30DCM	4	ER12-80N3SB	44	ER4-600J3PB	40
CCP-1-30M	4	ER12-80N6SB	44	ER4-600N3PB	42
CCP-1-60CF	6	ER1-30J3PB	40	ER4-60J3PB	40
CCP-2-100CF	6	ER1-30N3SB	42	ER4-60N3SB	42
CCP-2-30CC	4	ER1-400J3PB	40	ER4-63N3SB	44
CCP-2-30CF	6	ER1-400N3PB	42	ER4-63N6SB	44
CCP-2-30M	4	ER1-40N3SB	44	ER4-800L3PB	40
CCP-2-60CF	6	ER1-40N6SB	44	ER4-800N3PB	42
CCP-3-100CF	6	ER1-600J3PB	40	ER4-80N3SB	44
CCP-3-30CC	4	ER1-600N3PB	42	ER4-80N6SB	44
CCP-3-30CF	6	ER1-60J3PB	40	ER4P-100J3PB	40
CCP-3-30M	4	ER1-60N3SB	42	ER4P-100N3SB	42
CCP-3-60CF	6	ER1-63N3SB	44	ER4P-16N3SB	44
CCP-AUX	5, 7	ER1-63N6SB	44	ER4P-16N6SB	44
CCP-AUX-100	7	ER1-800L3PB	40	ER4P-200J3PB	40
CCPHM-FXX	5, 7	ER1-800N3PB	42	ER4P-200N3PB	42
CCPHM-RXX	7	ER1-80N3SB	44	ER4P-25N3SB	44
CCP-PLC-100	7	ER1-80N6SB	44	ER4P-25N6SB	44
CCP-PLC-IND	5, 7	ER3R-100J3PB	40	ER4P-30J3PB	40
DIR-01	36	ER3R-100N3SB	42	ER4P-30N3SB	42
DIR-02	28	ER3R-1200N3PB	42	ER4P-400J3PB	40
DIR-03	30, 31	ER3R-16N3SB	44	ER4P-400N3PB	42
DIR-04	32, 33	ER3R-16N6SB	44	ER4P-40N3SB	44
DIR-05	10	ER3R-200J3PB	40	ER4P-40N6SB	44
DIR-06	10	ER3R-200N3PB	42	ER4P-600J3PB	40
DIR-07	12, 14, 16, 18, 20	ER3R-25N3SB	44	ER4P-600N3PB	42
DIR-08	24, 25	ER3R-25N6SB	44	ER4P-60J3PB	40
DOOR-508	36	ER3R-30J3PB	40	ER4P-60N3SB	42
ER1-100J3PB	40	ER3R-30N3SB	42	ER4P-63N3SB	44
ER1-100N3SB	42	ER3R-400J3PB	40	ER4P-63N6SB	44
ER1-1200N3PB	42	ER3R-400N3PB	42	ER4P-800L3PB	40
ER1-16N3SB	44	ER3R-40N3SB	44	ER4P-800N3PB	42
ER1-16N6SB	44	ER3R-40N6SB	44	ER4P-80N3SB	44
ER1-200J3PB	40	ER3R-600J3PB	40	ER4P-80N6SB	44
ER1-200N3PB	42	ER3R-600N3PB	42	ER4X-100J3PB	40
ER12-100N3SB	42	ER3R-60J3PB	40	ER4X-100N3SB	42
ER12-1200N3PB	42	ER3R-60N3SB	42	ER4X-1200N3PB	42
ER12-16N3SB	44	ER3R-63N3SB	44	ER4X-16N3SB	44
ER12-16N6SB	44	ER3R-63N6SB	44	ER4X-16N6SB	44
ER12-200J3PB	40	ER3R-800L3PB	40	ER4X-200J3PB	40
ER12-200N3PB	42	ER3R-800N3PB	42	ER4X-200N3PB	42
ER12-25N3SB	44	ER3R-80N3SB	44	ER4X-25N3SB	44
ER12-25N6SB	44	ER3R-80N6SB	44	ER4X-25N6SB	44
ER12-30J3PB	40	ER4-100J3PB	40	ER4X-30J3PB	40
ER12-30N3SB	42	ER4-100N3SB	42	ER4X-30N3SB	42

Part Number Index

Part Number	Page #	Part Number	Page #	Part Number	Page #
ER4X-400J3PB	40	KIT-6POLE	37	RDF600J-2	24
ER4X-400N3PB	42	LUG1-2	20, 30	RDF600J-3	24, 25, 40
ER4X-40N3SB	44	LUG1-3	20, 30	RDF600J-4	24
ER4X-40N6SB	44	LUG1-4	20, 30	RDF60J-2	16
ER4X-600J3PB	40	LUG2-2	20, 30	RDF60J-3	16, 40
ER4X-600N3PB	42	LUG2-3	20, 30	RDF60J-4	16
ER4X-60J3PB	40	LUG2-4	20, 30	RDF800L-2	24
ER4X-60N3SB	42	LUG3-2	30	RDF800L-3	24, 25, 40
ER4X-63N3SB	44	LUG3-3	30	RDF800L-4	24
ER4X-63N6SB	44	LUG3-4	30	SH1-200	10
ER4X-800L3PB	40	LUG5-2	24	SH1-320	10
ER4X-800N3PB	42	LUG5-3	24, 32	SH1-400	10
ER4X-80N3SB	44	LUG5-4	24, 32	SH2-200	10
ER4X-80N6SB	44	LUG6-6	32	SH2-320	10
FLC120	12, 14, 16, 18, 21	LUG6-8	32	SH2-400	10
FLC36	12, 14, 16, 18, 21	POLE-16	37	SH4-150	28, 35, 36
FLC60	12, 14, 16, 18, 21	POLE-25	37	SH4-200	28, 35, 36
FLCM	12, 14, 16, 18, 21	POLE-40	37	SH4-320	28, 35, 36
FLH1	12, 14, 16, 18, 21	POLE98-100	28	SH5-200	12, 14, 16, 18, 20, 30
FLH2	12, 14, 16, 18, 21	POLE98-30	28	SH5-320	12, 14, 16, 18, 20, 30
FLRM	12, 14, 16, 18, 21	POLE98-60	28	SH5-400	12, 14, 16, 18, 20, 30
H12-03B	16, 18, 20, 30	RD1000-3	32	SH6-200	32
H12-03R	16, 18, 20, 30	RD1000-4	32	SH6-320	32
H12-05B	10, 12, 14	RD100-3	28, 42	SH6-400	32
H12-05R	10, 12, 14	RD100-3-SCCR	30	SH7-200	24
H4X-01B	28, 35, 36	RD1200-3	28, 42	SH7-320	24
H4X-01R	28, 35, 36	RD1200-4	32	SH7-400	24
H4X-02B	28, 35, 36	RD16-3-508	36, 44	SH-GUIDE1	28, 35, 36
H4X-02R	28, 35, 36	RD200-3	30, 42	SH-GUIDE2	30, 32
H4X-04B	10	RD200-4	30	TSH10-2TB	24
H4X-04R	10	RD25-3-508	36, 44	TSH10-3TB	24, 41
H4X-05B	10, 12, 14	RD30-3	28, 42	TSH10-4TB	24
H4X-05BHD	10, 12, 14	RD400-3	30, 42	TSH1-1TB	37
H4X-05R	10, 12, 14	RD400-4	30	TSH1-3TB	37, 45
H4X-05RHD	10, 12, 14	RD40-3-508	36, 44	TSH2-3TB	37, 45
H4X-05SB	12, 14	RD600-3	32, 42	TSH3-1TB	28
H4X-05SR	12, 14	RD600-4	32	TSH3-3TB	28, 43
H4X-05TB	10, 12, 14	RD60-3	28, 42	TSH4-3B	31, 43
H4X-05TR	10, 12, 14	RD63-3-508	36, 4	TSH4-3T	31, 43
H4X-06B	16, 18, 20, 30	RD800-3	32, 42	TSH4-4TB	31
H4X-06BHD	16, 18, 20, 30	RD800-4	32	TSH5-3B	31, 43
H4X-06R	16, 18, 20, 30	RD80-3-508	36, 44	TSH5-3T	31, 43
H4X-06RHD	16, 18, 20, 30	RDF100J-2	18	TSH5-4TB	31
H4X-06SB	16, 18, 20	RDF100J-3	18, 40	TSH6-3TB	33, 43
H4X-06SR	16, 18, 20	RDF100J-4	18	TSH6-4TB	33
H4X-06TB	16, 18, 20	RDF200J-2	20	TSH7-3TB	33, 43
H4X-06TR	16, 18, 20	RDF200J-3	20, 21, 40	TSH7-4TB	33
H4X-07B	24, 32	RDF200J-4	20	TSH8-2TB	21
H4X-07BHD	24, 32	RDF30CC-3	10	TSH8-3TB	21, 41
H4X-07R	24, 32	RDF30CC-3N	10	TSH8-4TB	21
H4X-07RHD	24, 32	RDF30J-2	12	TSH9-2TB	21
H4X-08B	32	RDF30J-3	12, 40	TSH9-3TB	21, 41
H4X-08BHD	32	RDF30J-3-COMP	10	TSH9-4TB	21
H4X-08R	32	RDF30J-3N-COMP	10		
H4X-08RHD	32	RDF30J-4	12		
H79-2	12, 14, 17, 19, 21	RDF400J-2	20		
H79-3	21	RDF400J-3	20, 21, 40		
H79-4	24	RDF400J-4	20		

Customer Assistance

Customer Satisfaction Team

Available to answer questions regarding Cooper Bussmann products & services Monday-Friday, 8:00 a.m. – 6:00 p.m. Central Time. Contact:

- Toll-free phone: 855-287-7626 (855-BUSSMANN)
- Toll-free fax: 800-544-2570
- E-mail: busscustsat@cooperindustries.com

Emergency and After-Hours Orders

Next flight out or will call shipment for time-critical needs. Customers pay only standard product price, rush freight charges, & modest emergency service fee. Place these orders through the Customer Satisfaction Team during regular business hours. For after-hours, contact:

- After hours phone 314-995-1342

C³ – the Enhanced, Online Cooper Customer Center

Provides real time product availability, net pricing, order status & shipment tracking across six Cooper divisions: B-Line, Bussmann, Crouse-Hinds, Lighting, Power Systems & Wiring Devices. Call 877-995-5955 for log-in assistance. Available at:

- www.cooperc3.com

Application Engineering

Technical assistance is available to all customers. Application support is available Monday-Friday, 8:00 a.m. – 5:00 p.m. Central Time. Contact:

- Toll-free phone: 855-287-7626 (855-BUSSMANN)
- E-mail: fusetech@cooperindustries.com


Online Resources

Visit www.cooperbussmann.com for the following resources:

- Product search & cross-reference
- Product & technical materials
- Solutions centers for information on topical issues including arc flash, selective coordination & short-circuit current rating
- Technical tools, like our arc flash calculator
- Where to purchase Cooper Bussmann product

Cooper Bussmann
St. Louis, MO 63178
636-394-2877
www.cooperbussmann.com

Your Authorized Cooper Bussmann Distributor is:

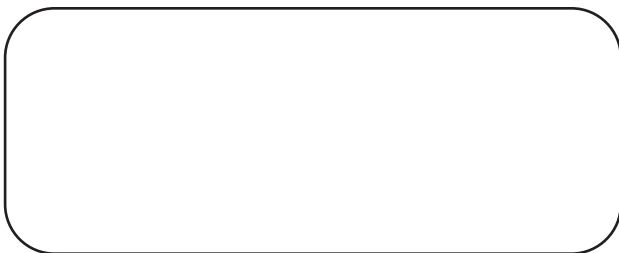

Cooper US, Inc.
600 Travis Street, Suite 5600
Houston, TX 77002-1001
P: 713-209-8400
www.cooperindustries.com